

4

3


2

DWG NO. 1 2220000427.PDF

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND IS THE PROPERTY OF INTERCONNECT SYSTEMS INTERNATIONAL, LLC (ISI). IT SHALL NOT BE REPRODUCED, COPIED, OR DISCLOSED TO THIRD PARTIES WITHOUT THE PRIOR WRITTEN CONSENT OF ISI.

REVISION HISTORY

REV	DESCRIPTION	ECN	DATE	APRV'D
1	INITIAL RELEASE	--	6/1/18	JAG

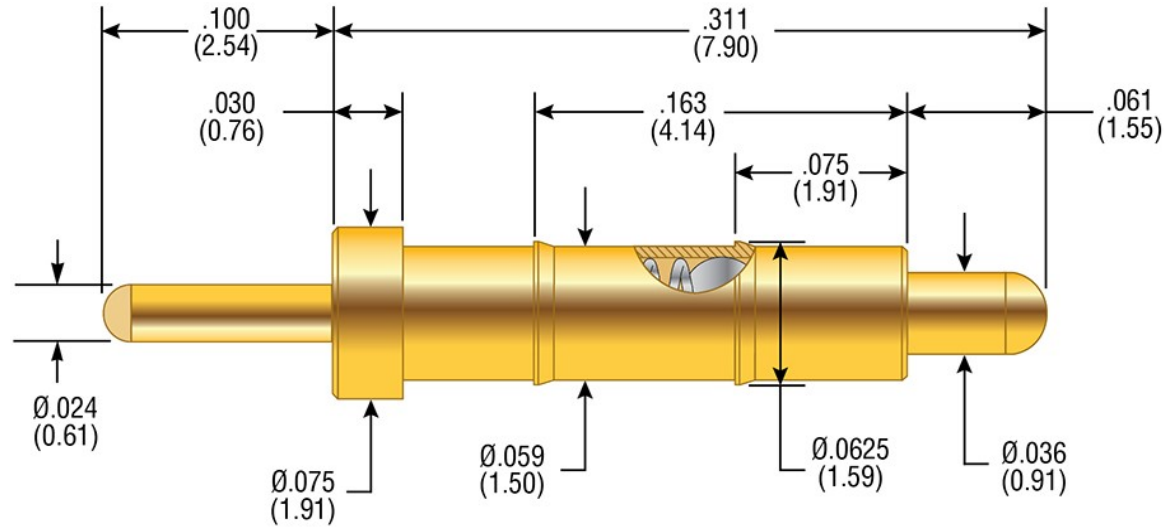

Temperature Rating: -55°C to +150°C
 Current Rating: 10 amps
 Contact Resistance: 25 mOhm
 Spring Force: $\pm 20\%$

STATE	TRAVEL	SPRING FORCE
Initial Travel	--	13.89g (0.49oz)
Recommended Travel	1.01mm (0.040")	70.87g (2.50oz)
Full Travel	1.52mm (0.060")	--

PART	MATERIAL	FINISH
Plunger	Beryllium Copper	Gold Plated
Barrel	Brass	Gold Plated
Spring	Stainless Steel	Gold Plated
Bias Ball	Stainless Steel	--

CONTRACT NO.



INTERCONNECT SYSTEMS INTL, LLC
 a **molex** company
 741 FLYNN ROAD, CAMARILLO, CALIFORNIA 93012

DRAWN BY: R. FLORES DATE: 06/01/18
 DESIGNER: ET DATE: 06/01/18
 CHECKER: J. GELACIO DATE: 06/01/18

TITLE: POGO PIN
 1.91mm Pitch, C Plunger, 70.87g SF, Au Plate Finish

QA: N/A
 PROCESS ENG.: N/A

SIZE: A RoHS SCALE: N/A DRAWING NO.: 2220000427 REV: 1
 SAVED AS: 2220000427.PDF FINISHED ASSY: -- SHEET 1 OF 1

4

3

2

1