


REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	01/10/08	JAG

SKT3054

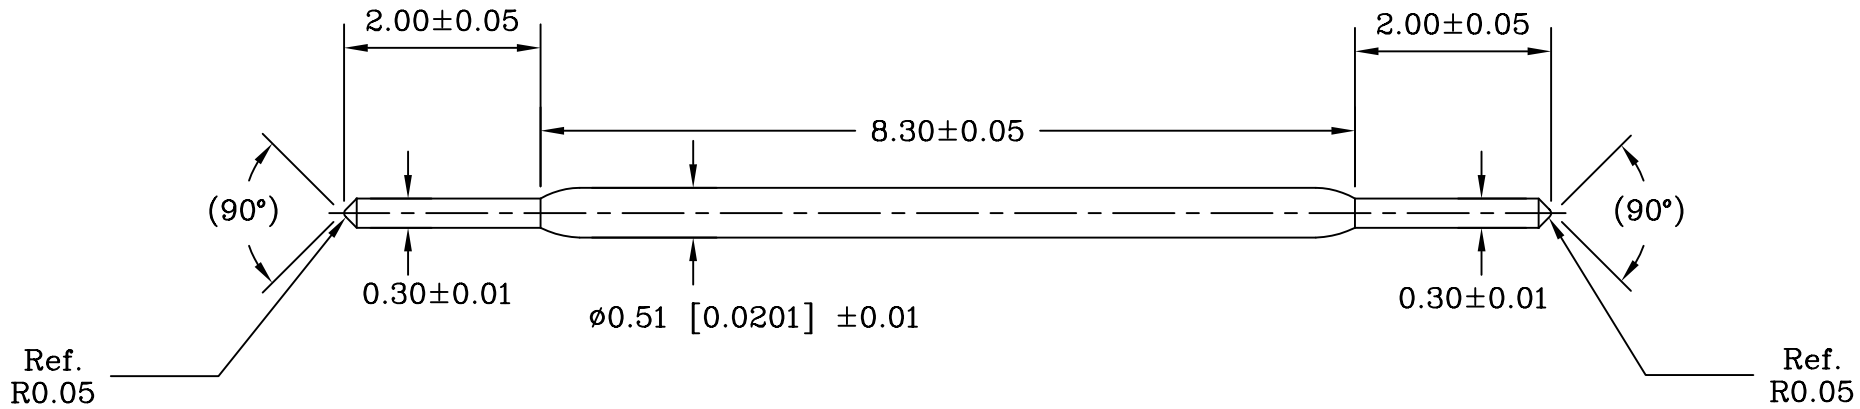

POINTING ACCURACY: ±0.055mm


SPRING FORCE: [ +3g / -1g ]

- 0.6g (0.021oz) AT INITIAL TRAVEL
- 3.0g (0.106oz) AT 2.74mm (0.1079) RECOMMENDED TRAVEL
- 3.3g (0.116oz) AT 3.00mm (0.1181) FULL TRAVEL

MATERIAL & FINISH

- PLUNGER (x2) HARDENED BERYLLIUM COPPER / GOLD PLATED
- BARREL PHOSPHOR BRONZE / GOLD PLATED
- SPRING STAINLESS WIRE / GOLD PLATED

ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED

	<b>EMULATION TECHNOLOGY, INC.</b> — VLSI and SMT ADAPTERS and ACCESSORIES —	
	759 FLYNN ROAD CAMARILLO, CA 93012	TEL: (805) 383-8480 FAX: (805) 383-8484
SHEET: 1 OF 1	DATE: 01/10/08	REVISION: <b>A</b>
CHECKED:		DRAWN: Janice A. Gelacio
DO NOT SCALE DRAWING		DESCRIPTION: POGO-PIN-12.3-2