


REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	04/02/13	JAG

SKT3906

(DEVICE SIDE)

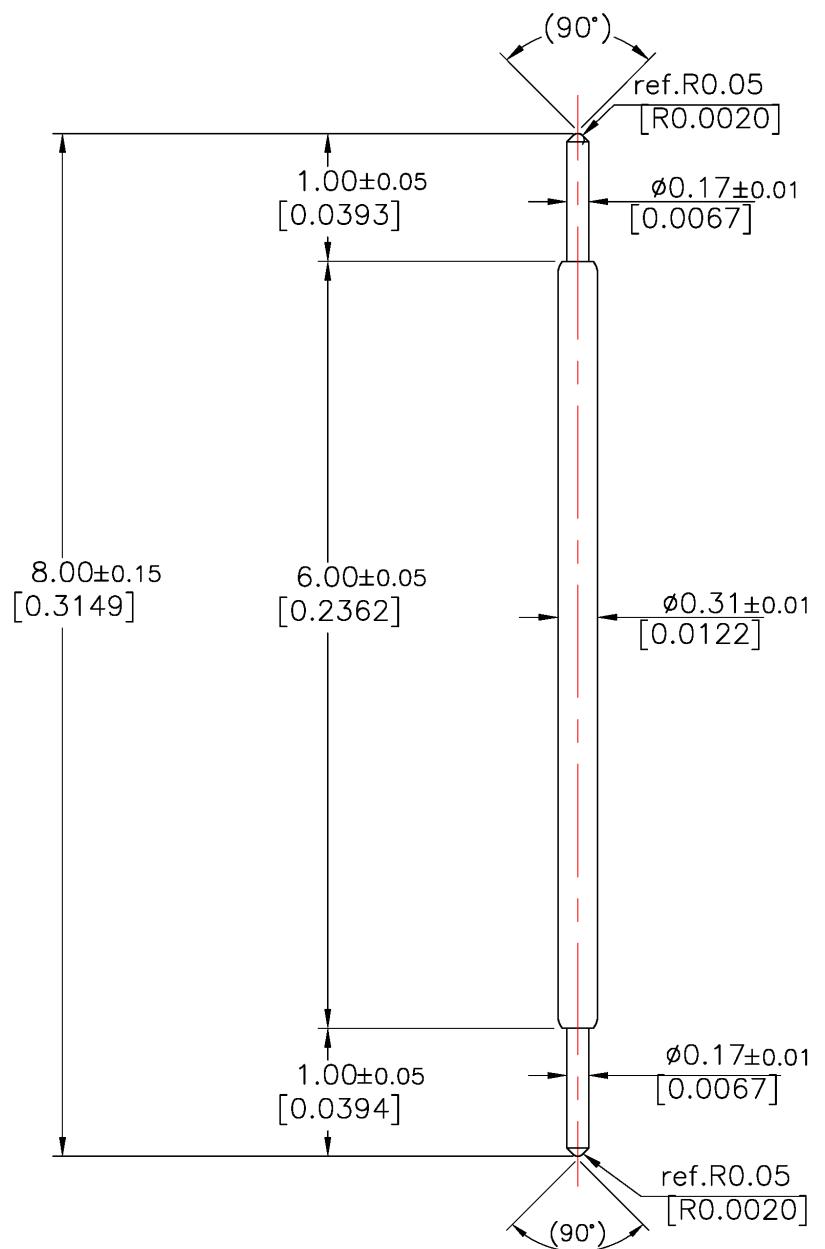

(BOARD SIDE)


Pointing Accuracy: ± 0.04 mm

Spring Force: ± 20%

STATE	TRAVEL	SPRING FORCE
Initial Travel	--	6.6g (0.2320 oz)
Recommended Travel	0.80mm (0.0315)	26.4g (0.932 oz)
Full Travel	1.05mm (0.0413)	31.7g (1.119 oz)

PART	MATERIAL	FINISH
Plunger (Device Side)	Hardened Beryllium Copper	Gold Plated
Plunger (Board Side)	Hardened Beryllium Copper	Gold Plated
Barrel	Phosphor Bronze	Gold Plated
Spring	Music Wire	Gold Plated

ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED

	<b>EMULATION TECHNOLOGY, INC.</b> VLSI and SMT ADAPTERS and ACCESSORIES	
	759 FLYNN ROAD CAMARILLO, CA 93012	TEL: (805) 383-8480 FAX: (805) 383-8484
SHEET: 1 OF 1	DATE: 04/02/13	REVISION: A
CHECKED:		PREPARED BY: J. GELACIO
DO NOT SCALE DRAWING		ITEM: POGO-PIN-8.00-3 DESCRIPTION: POGO-PIN-8.00-3