


These drawings and specifications are the property of Interconnect Systems International, LLC, and shall not be reproduced, or copied, or used without prior written permission.

REVISION HISTORY				
REV	DESCRIPTION	ECN	DATE	APRVD
1	INITIAL RELEASE	--	3/21/18	MN

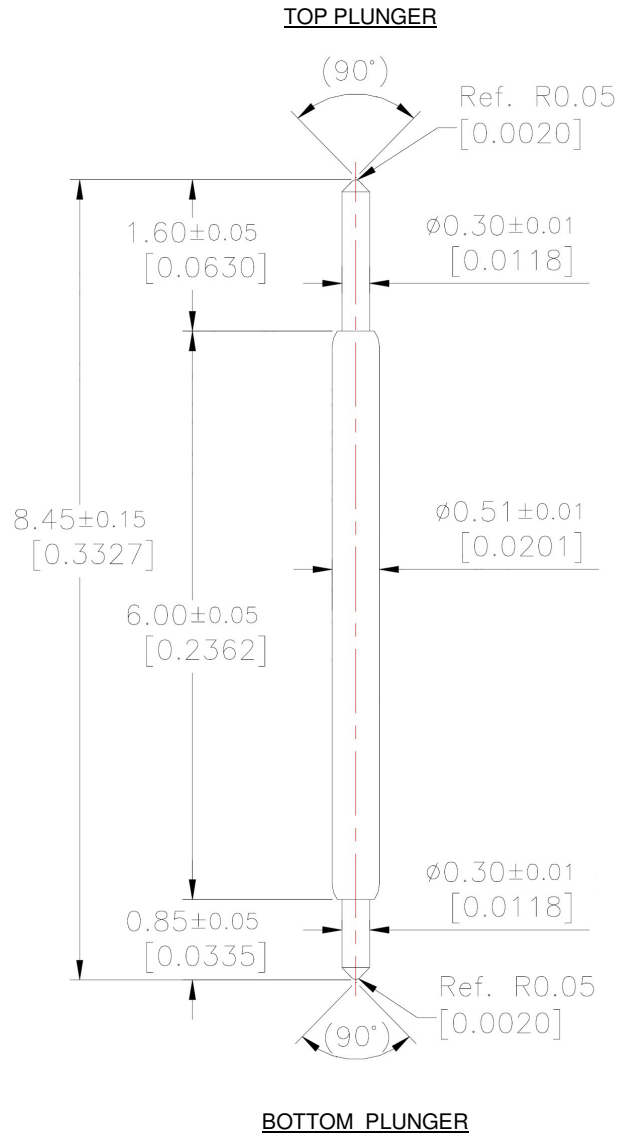

Pointing Accuracy: ± 0.05 mm

Spring Force: ± 20%


STATE	TRAVEL	SPRING FORCE
Initial Travel	--	14.4g (0.508oz)
Recommended Travel	0.60mm (0.0236)	33.9g (1.196oz)
Full Travel	1.40mm (0.0551)	59.8g (2.109oz)

PART	MATERIAL	FINISH
Spring	Music Wire	Gold Plated
Barrel	Phosphor Bronze	Gold Plated
Top Plunger	Hardened Beryllium Copper	Gold Plated
Bottom Plunger	Hardened Beryllium Copper	Gold Plated

DIMENSIONS ARE IN MM. UNLESS OTHERWISE SPECIFIED TOLERANCES ARE:

DECIMALS: X.X ±0.100 X.XX ±0.050 X.XXX ±0.025

ANGULAR: X.X° ±1.0° X.XX° ±0.5°

CONTRACT NO. SO28137				INTERCONNECT SYSTEMS INTERNATIONAL, LLC a <b>molex</b> company	
DRAWN BY M.Nunes		DATE 3/21/18		741 FLYNN ROAD, CAMARILLO, CALIFORNIA 93012	
DESIGNER M.Nunes		DATE 3/21/18		ASSEMBLY DRAWING 0.65mm Pitch, E Plungers, 33.9g SF, Au Plate Finish	
CHECKER R.Flores		DATE 3/21/18			
QA N/A	DATE N/A	SIZE A	RoHS	SCALE N/A	DRAWING NO. 2220000138.PDF
PROCESS ENG. N/A	DATE N/A	SAVED AS: 2220000138.PDF	FINISHED ASSY: --		REV 1

D  
C  
B  
A

D  
C  
B  
A