


.100	HDD	40 Male + 4 Male Power	Straddle Mount	Power next to Signal
------	-----	------------------------	----------------	----------------------

Disk Drive IDE Combo Conn: 40 Male + 4 Male Power – PCB Edge mount

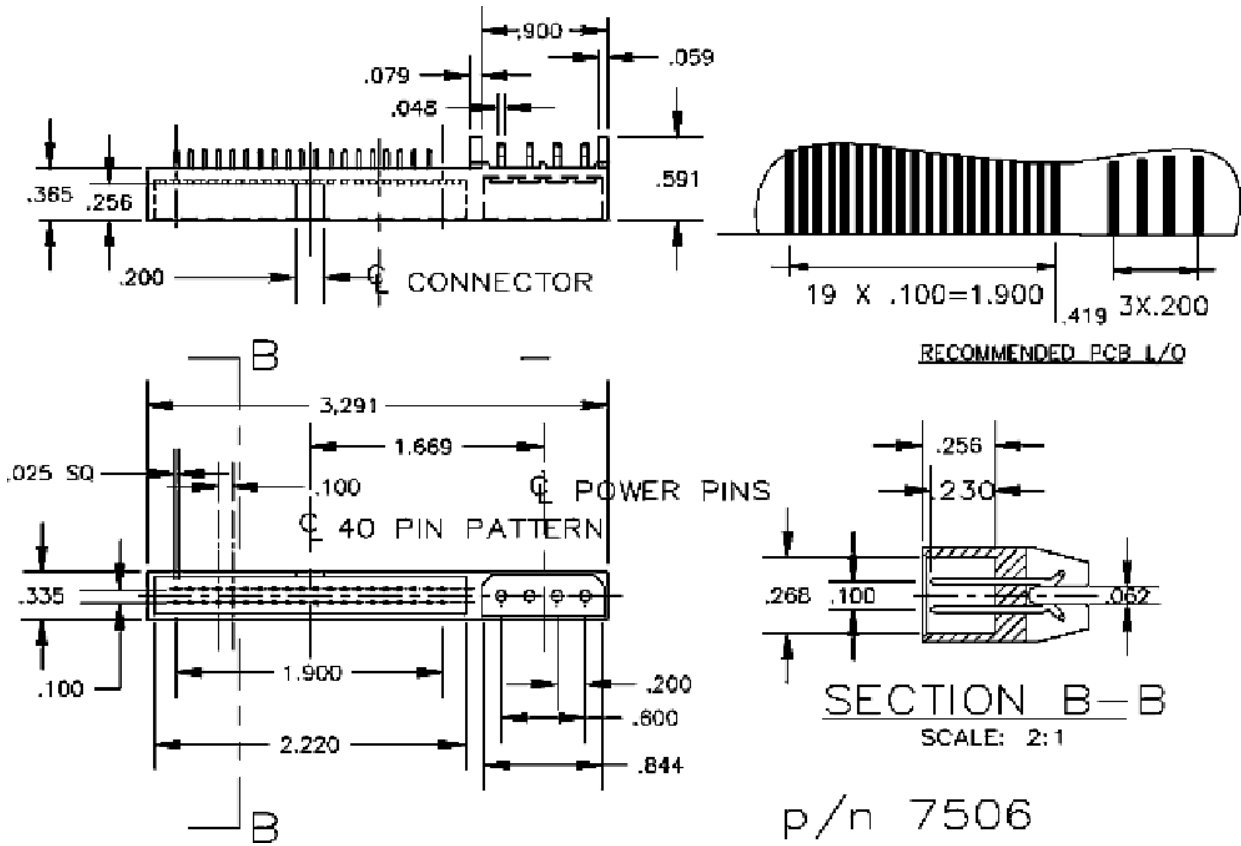

Base Part Number	A		B		C		D		E		Plating Options	Number of Postions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
7506											X	One Per

Technical Notes	
<b>Insulation Material:</b>	Glass Filled Nylon 46 - UL 94V-0 rated - Black (std)
<b>Insulation Resistance:</b>	5000 MegOhm @ 500VDC
<b>Plating:</b>	Power = tin : Signal = G2LF (gold/ tin)
<b>Max Processing Temp:</b>	250°C for 60 seconds
<b>Plastic:</b>	High Temperature Plastic
<b>INTERCONNECT SYSTEMS INC.</b>	
741 Flynn Road, Camarillo, Ca 93012 · (805) 482-2870 · fax (805) 482-8470 · e-mail: <a href="mailto:info@isipkg.com">info@isipkg.com</a>	