


.100	HDD	50 Female + 4 Female Power	Right Angle	Signal pins on right side
------	-----	----------------------------	-------------	---------------------------

Disk Drive IDE Combo Conn: 50 Female + 4 Female Power - Right Angle

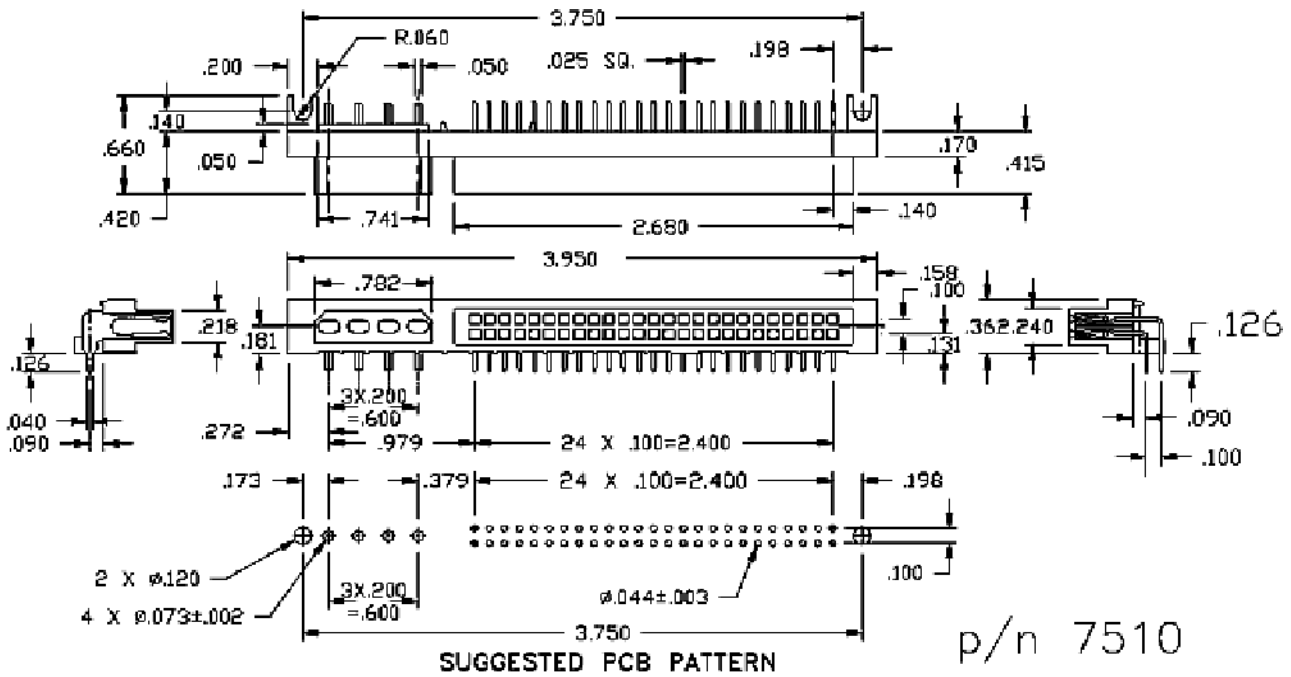

Base Part Number	A		B		C		D		E		Plating Options	Number of Positions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
7510											X	One Per

Technical Notes	
Mates with Drives from:	Seagate - IBM - Quantum (see Maxtor model list)- Fujitsu - Samsung
Insulation Material:	Glass Filled Nylon 46 - UL 94V-0 rated - Black (std)
Insulation Resistance:	5000 MegOhm @ 500VDC
Plating:	Power = tin : Signal = G2LF (gold/ tin)
Insertion Force:	12.8 pounds (5.8 Kg) total
Extraction Force:	8 pounds (3.6 Kg)
Max Processing Temp:	250°C for 60 seconds
Plastic:	High Temperature Plastic
INTERCONNECT SYSTEMS INC.	
741 Flynn Road, Camarillo, Ca 93012 · (805) 482-2870 · fax (805) 482-8470 · e-mail: info@isipkg.com	