


.050	Header	Double Row - .016 Low Profile	Rt Angle	Thru Hole
------	--------	-------------------------------	----------	-----------

.050" Center, .016" Square Pin, Low Profile - Double Row Right Angle Header

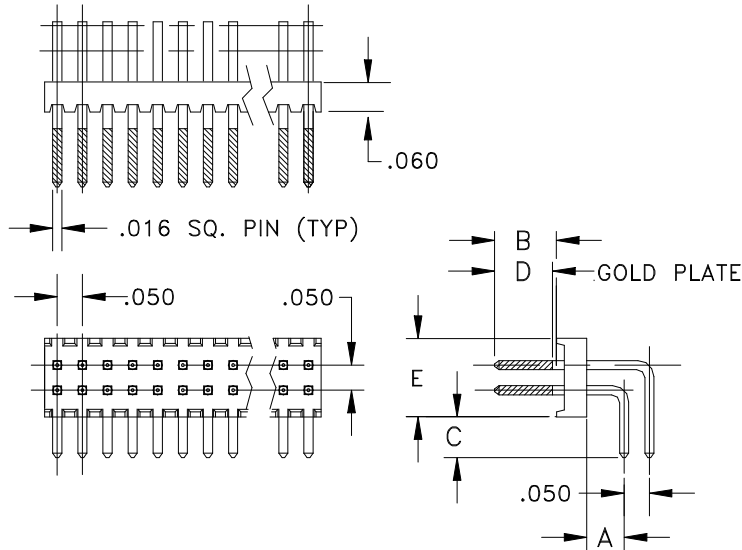

Base Part Number	A		B		C		D		E		Plating Options	Number of Positions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
3751R	1.52	0.060	3.99	0.157	2.87	0.113	3.68	0.145	3.96	0.156	G2LF : TLF	2-120
3752R	1.52	0.060	3.56	0.140	3.61	0.142	3.68	0.145	3.18	0.125	G2LF : TLF	2-120
3750R	1.52	0.060	3.56	0.140	3.30	0.130	3.68	0.145	3.96	0.156	G2LF : TLF	2-120
3753R	1.52	0.060	3.99	0.157	3.25	0.128	3.68	0.145	3.18	0.125	G2LF : TLF	2-120
3757R	1.52	0.060	2.41	0.095	2.29	0.090	2.41	0.095	3.18	0.125	G2LF : TLF	2-120
3754R	1.52	0.060	4.57	0.180	2.29	0.090	3.68	0.145	3.18	0.125	G2LF : TLF	2-120
3755R	1.52	0.060	3.81	0.150	2.29	0.090	3.68	0.145	3.18	0.125	G2LF : TLF	2-120
3756R	1.52	0.060	2.67	0.105	2.29	0.090	2.67	0.105	3.18	0.125	G2LF : TLF	2-120

Technical Notes	
<b>Contact Material:</b>	Pin: Phosphor Bronze - .016"sq. pin, drawn wire, burr free both ends
<b>Insulation Material:</b>	Glass Filled Nylon 46 - UL 94V-0 rated - Black (std)
<b>Heat Deflection:</b>	260°C @ 264 PSI per ASTM D648
<b>Insulation Resistance:</b>	5000 MegOhm @ 500VDC
<b>Current Rating:</b>	1 amps continuous @ 100 VDC/contact
<b>Max Processing Temp:</b>	250°C for 60 seconds
<b>Plastic:</b>	High Temperature Plastic
<b>INTERCONNECT SYSTEMS INC.</b>	
741 Flynn Road, Camarillo, Ca 93012 · (805) 482-2870 · fax (805) 482-8470 · e-mail: <a href="mailto:info@isipkg.com">info@isipkg.com</a>	