


.050	Header	Single Row - .016 Sq. Pin	Rt Angle	Surface Mount
------	--------	---------------------------	----------	---------------

.050" Center, .016" Square Pin - Single Row Right Angle - Surface Mount Header

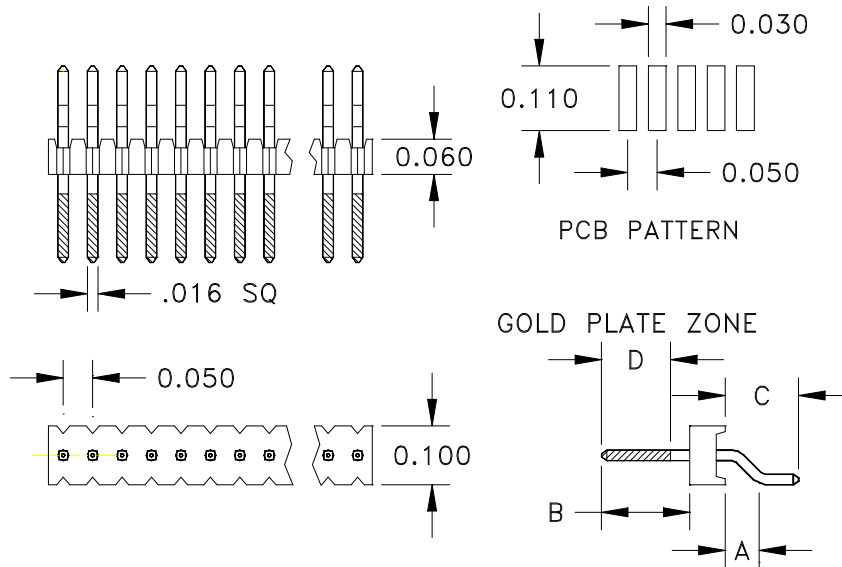

Base Part Number	A		B		C		D		E		Plating Options	Number of Positions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
3375	1.52	0.060	2.79	0.110	4.32	0.170	2.79	0.110			G2LF: TLF	2-25

Technical Notes	
Contact Material:	Pin: Phosphor Bronze - .016"sq pin, drawn wire, burr free both ends
Insulation Material:	Glass Filled Nylon 46 - UL 94V-0 rated - Black (std)
Heat Deflection:	260°C @ 264 PSI per ASTM D648
Insulation Resistance:	5000 MegOhm @ 500VDC
Current Rating:	1 amps continuous @ 100 VDC/contact
Max Processing Temp:	250°C for 60 seconds
Plastic:	High Temperature Plastic
INTERCONNECT SYSTEMS INC.	
741 Flynn Road, Camarillo, Ca 93012 · (805) 482-2870 · fax (805) 482-8470 · e-mail: info@isipkg.com	