


2mm	Header	Trile Row – Round Pin	Straight	Thru Hole
-----	--------	-----------------------	----------	-----------

2mm Center - .020” Diameter Round Pin, Triple Row Straight Header

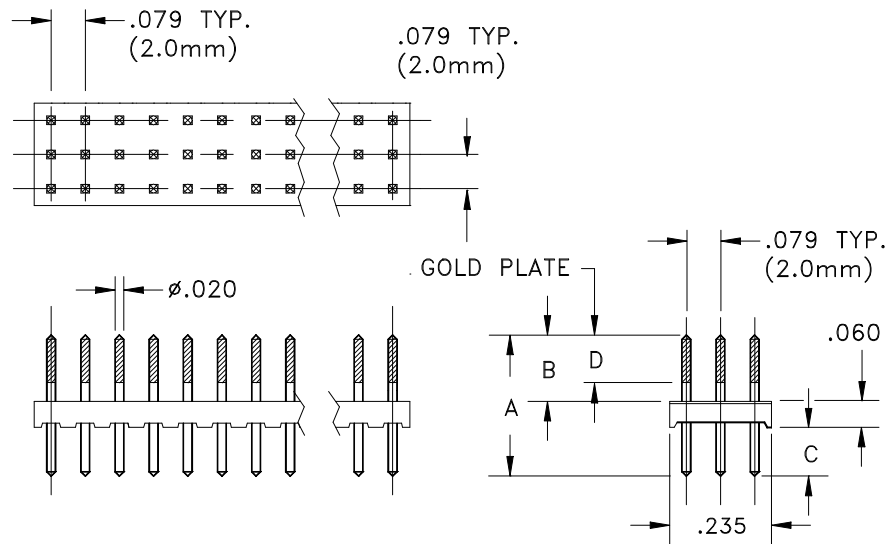

Base Part Number	A		B		C		D		E		Plating Options	Number of Positions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
2872MS	8.13	0.320	3.56	0.140	3.05	0.120	3.56	0.140			G2LF : TLF	3-90

Technical Notes	
Contact Material:	Pin: Phosphor Bronze - .020” round pin, burr free both ends
Insulation Material:	Glass Filled Nylon 46 - UL 94V-0 rated - Black (std)
Heat Deflection:	260°C @ 264 PSI per ASTM D648
Insulation Resistance:	5000 MegOhm @ 500VDC
Current Rating:	2 amps continuous @ 100 VDC/contact
Max Processing Temp:	250°C for 60 seconds
Plastic:	High Temperature Plastic
INTERCONNECT SYSTEMS INC.	
741 Flynn Road, Camarillo, Ca 93012 · (805) 482-2870 · fax (805) 482-8470 · e-mail: info@isipkg.com	