


<b>2mm</b>	<b>Header</b>	<b>Double Row</b>	<b>Rt Angle</b>	<b>Thru Hole</b>
------------	---------------	-------------------	-----------------	------------------

2mm Center - .020 inch Square Pin - Double Row Right Angle Header

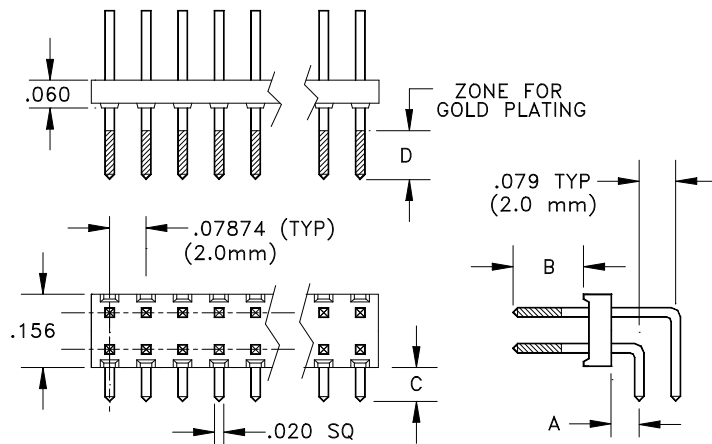

Base Part Number	A		B		C		D		E		Plating Options	Number of Positions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
<b>2701R</b>	1.52	0.060	3.56	0.140	3.15	0.124	3.56	0.140			G2LF : TLF	4-80
<b>2702R</b>	1.52	0.060	3.99	0.157	2.79	0.110	3.56	0.140			G2LF : TLF	4-80
<b>2703R</b>	1.52	0.060	3.99	0.157	2.03	0.080	3.56	0.140			G2LF : TLF	4-80
<b>2704R</b>	1.52	0.060	3.56	0.140	2.41	0.095	3.56	0.140			G2LF : TLF	4-80
<b>2705R</b>	1.52	0.060	4.27	0.168	2.46	0.097	3.56	0.140			G2LF : TLF	4-80

Technical Notes	
<b>Contact Material:</b>	Pin: Phosphor Bronze - .020"sq pin, burr free both ends
<b>Insulation Material:</b>	Glass Filled Nylon 46 - UL 94V-0 rated - Black (std)
<b>Heat Deflection:</b>	260°C @ 264 PSI per ASTM D648
<b>Insulation Resistance:</b>	5000 MegOhm @ 500VDC
<b>Current Rating:</b>	2 amps continuous @ 100 VDC/contact
<b>Max Processing Temp:</b>	250°C for 60 seconds
<b>Plastic:</b>	High Temperature Plastic
<b>INTERCONNECT SYSTEMS INC.</b>	
741 Flynn Road, Camarillo, Ca 93012 · (805) 482-2870 · fax (805) 482-8470 · e-mail: <a href="mailto:info@isipkg.com">info@isipkg.com</a>	