


2mm	Header	Single Row - High Profile	Rt Angle	Thru Hole
-----	--------	---------------------------	----------	-----------

2mm Center, .020" Square Pin, High Profile, Single Row Right Angle Header

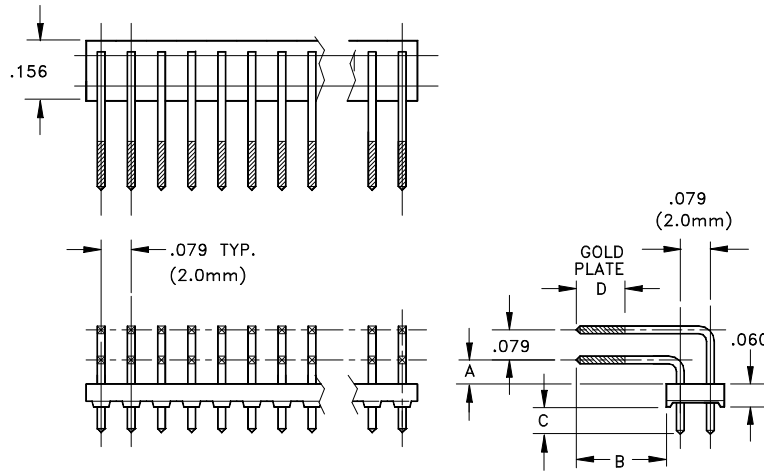

Base Part Number	A		B		C		D		E		Plating Options	Number of Positions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
2750R	1.52	0.060	3.56	0.140	3.18	0.125	3.56	0.140			G2LF : TLF	4-80
2751R	1.52	0.060	3.99	0.157	2.79	0.110	3.56	0.140			G2LF : TLF	4-80
2752R	1.52	0.060	3.99	0.157	2.03	0.080	3.56	0.140			G2LF : TLF	4-80
2753R	1.52	0.060	3.56	0.140	2.54	0.100	3.56	0.140			G2LF : TLF	4-80
2752R	1.52	0.060	3.99	0.157	2.03	0.080	3.56	0.140			G2LF : TLF	4-80

Technical Notes	
Contact Material:	Pin: Phosphor Bronze - .020"sq pin, burr free both ends
Insulation Material:	Glass Filled Nylon 46 - UL 94V-0 rated - Black (std)
Heat Deflection:	260°C @ 264 PSI per ASTM D648
Insulation Resistance:	5000 MegOhm @ 500VDC
Current Rating:	2 amps continuous @ 100 VDC/contact
Max Processing Temp:	250°C for 60 seconds
Plastic:	High Temperature Plastic
INTERCONNECT SYSTEMS INC.	
741 Flynn Road, Camarillo, Ca 93012 · (805) 482-2870 · fax (805) 482-8470 · e-mail: info@isipkg.com	