



.100"	Header	Single Row - Low Profile	Rt Angle	Thru Hole
-------	--------	--------------------------	----------	-----------

.100" Center, .025" Square Pin, Low Profile, Single Row Right Angle Header

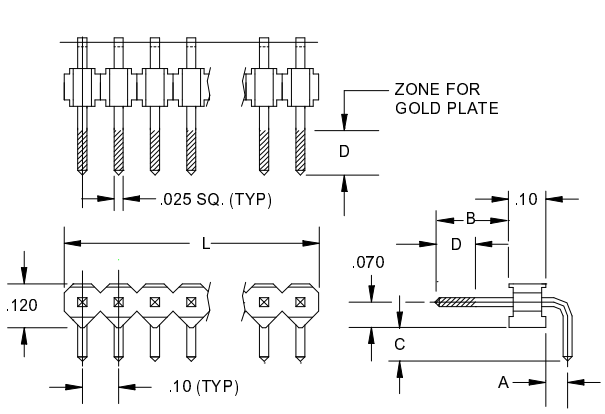

"R" = STANDARD PLASTIC

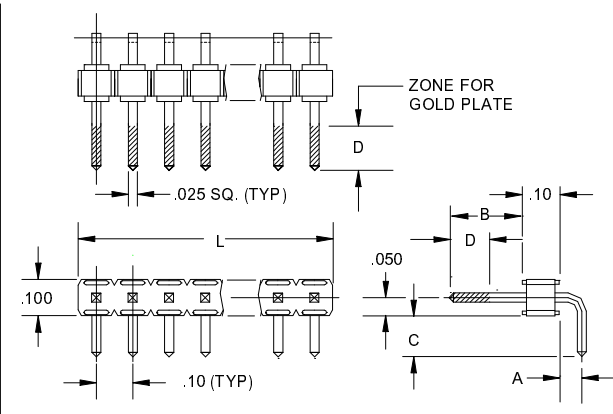

"RM" = ALTERNATE PLASTIC  
plastic is .100 wide instead of .120

Base Part Number	A		B		C		D		E		Plating Options	Number of Positions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
4304R 4304RM	1.52	0.060	5.84	0.230	4.83	0.190	5.84	0.230	5.33	0.210	G2LF : G1 : TLF	2-40
4326R 4326RM	1.52	0.060	5.84	0.230	7.37	0.290	5.84	0.230	7.87	0.310	G2LF : G1 : TLF	2-40
4321R 4321RM	1.52	0.060	5.84	0.230	9.91	0.390	5.84	0.230	10.41	0.410	G2LF : G1 : TLF	2-40
4301R 4301RM	1.52	0.060	5.84	0.230	2.29	0.090	5.84	0.230	2.79	0.110	G2LF : G1 : TLF	2-40
4307R 4307RM	1.52	0.060	5.84	0.230	12.45	0.490	5.84	0.230	12.95	0.510	G2LF : G1 : TLF	2-40
4322R 4322RM	1.52	0.060	3.30	0.130	2.16	0.085	5.84	0.230	2.67	0.105	G2LF : G1 : TLF	2-40
4319R 4319RM	1.52	0.060	5.84	0.230	14.99	0.590	5.84	0.230	15.49	0.610	G2LF : G1 : TLF	2-40
4310R 4310RM	1.52	0.060	5.84	0.230	17.53	0.690	5.84	0.230	18.03	0.710	G2LF : G1 : TLF	2-40
4336R 4336RM	1.52	0.060	8.08	0.318	5.13	0.202	7.62	0.300	5.64	0.222	G2LF : G1 : TLF	2-40
4305R 4305RM	1.52	0.060	8.08	0.318	2.59	0.102	7.62	0.300	3.10	0.122	G2LF : G1 : TLF	2-40
4323R 4323RM	4.06	0.160	5.84	0.230	7.37	0.290	5.84	0.230	7.87	0.310	G2LF : G1 : TLF	2-40
4327R 4327RM	4.06	0.160	5.84	0.230	9.91	0.390	5.84	0.230	10.41	0.410	G2LF : G1 : TLF	2-40
4309R 4309RM	4.06	0.160	5.84	0.230	12.45	0.490	5.84	0.230	12.95	0.510	G2LF : G1 : TLF	2-40
4308R 4308RM	4.06	0.160	5.84	0.230	14.99	0.590	5.84	0.230	15.49	0.610	G2LF : G1 : TLF	2-40
4303R 4303RM	4.06	0.160	5.84	0.230	4.83	0.190	5.84	0.230	5.33	0.210	G2LF : G1 : TLF	2-40
4320R 4320RM	4.06	0.160	5.84	0.230	2.29	0.090	5.84	0.230	2.79	0.110	G2LF : G1 : TLF	2-40
4325R 4325RM	4.06	0.160	5.84	0.230	2.29	0.090	5.84	0.230	2.79	0.110	G2LF : G1 : TLF	2-40

<b>Technical Notes</b>	
<b>Contact Material:</b>	Pin: Phosphor Bronze - .025 inch sq pin - burr free both ends
<b>Insulation Material:</b>	Glass Filled Nylon 46 - UL 94V-0 rated - Black (std)
<b>Heat Deflection:</b>	260°C @ 264 PSI per ASTM D648
<b>Insulation Resistance:</b>	5000 MegOhm @ 500VDC
<b>Current Rating:</b>	3 amps continuous @ 100 VDC/contact
<b>Max Processing Temp:</b>	250°C for 60 seconds
<b>Plastic:</b>	High Temperature Plastic
<b><i>INTERCONNECT SYSTEMS INC.</i></b> 741 Flynn Road, Camarillo, Ca 93012 · (805) 482-2870 · fax (805) 482-8470 · e-mail: <a href="mailto:info@isipkg.com">info@isipkg.com</a>	