


.100	Header	Triple Row	Straight	Thru Hole
-------------	---------------	-------------------	-----------------	------------------

.100 inch Center - .025 inch Square Pin - Triple Row Straight Header

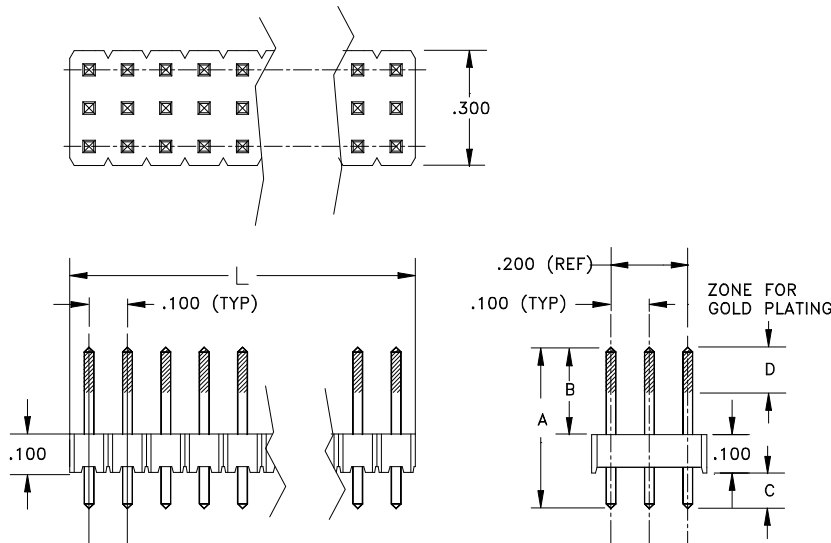

Base Part Number	A		B		C		D		E		Plating Options	Number of Positions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
3500S	8.38	0.330	2.92	0.115	2.92	0.115	2.92	0.115			G2LF: G1: TLF	3-120
3548S	8.38	0.330	2.36	0.093	3.48	0.137	2.36	0.093			G2LF: G1: TLF	3-120
3502S	11.56	0.455	5.97	0.235	3.05	0.120	5.97	0.235			G2LF: G1: TLF	3-120
3504S	13.59	0.535	8.08	0.318	2.92	0.115	7.87	0.310			G2LF: G1: TLF	3-120
3507S	18.67	0.735	5.97	0.235	10.16	0.400	5.97	0.235			G2LF: G1: TLF	3-120

Technical Notes	
Contact Material:	Pin: Phosphor Bronze - .025 inch sq pin - burr free both ends
Insulation Material:	Glass Filled Nylon 46 - UL 94V-0 rated - Black (std)
Heat Deflection:	260°C @ 264 PSI per ASTM D648
Insulation Resistance:	5000 MegOhm @ 500VDC
Current Rating:	3 amps continuous @ 100 VDC/contact
Max Processing Temp:	250°C for 60 seconds
Plastic:	High Temperature Plastic
INTERCONNECT SYSTEMS INC.	
741 Flynn Road, Camarillo, Ca 93012 · (805) 482-2870 · fax (805) 482-8470 · e-mail: info@isipkg.com	