


.100	Header	Triple Row - Spacer	Straight	Thru Hole
------	--------	---------------------	----------	-----------

.100 inch Center - .025 inch Square Pin - Board Stacking - Triple Row Straight Header

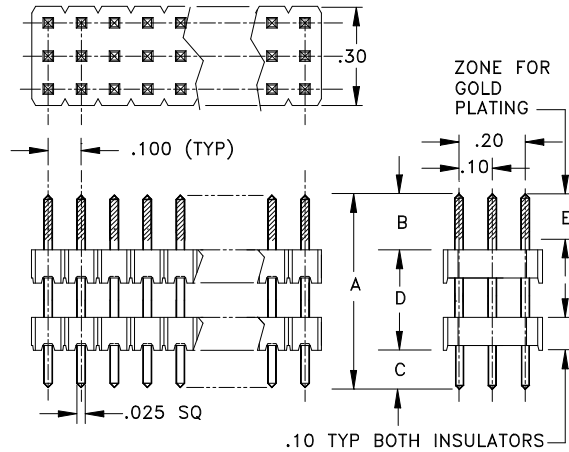

Base Part Number	A		B		C		D		E		Plating Options	Number of Positions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
DH3-235/200/100	13.59	0.535	5.97	0.235	2.54	0.100	5.08	0.200	5.84	0.230	G2LF : G1 : TLF	6-120
DH3-235/300/100	16.13	0.635	5.97	0.235	2.54	0.100	7.62	0.300	5.84	0.230	G2LF : G1 : TLF	6-120
DH3-235/400/100	18.67	0.735	5.97	0.235	2.54	0.100	10.16	0.400	5.84	0.230	G2LF : G1 : TLF	6-120
DH3-235/500/100	21.21	0.835	5.97	0.235	2.54	0.100	12.70	0.500	5.84	0.230	G2LF : G1 : TLF	6-120
DH3-235/370/230	21.21	0.835	5.97	0.235	5.84	0.230	9.40	0.370	5.84	0.230	G2LF : G1 : TLF	6-120
DH3-235/600/100	23.75	0.935	5.97	0.235	2.54	0.100	15.24	0.600	5.84	0.230	G2LF : G1 : TLF	6-120
DH3-235/470/230	23.75	0.935	5.97	0.235	5.84	0.230	11.94	0.470	5.84	0.230	G2LF : G1 : TLF	6-120
DH3-235/570/230	26.29	1.035	5.97	0.235	5.84	0.230	14.48	0.570	5.84	0.230	G2LF : G1 : TLF	6-120
DH3-235/700/100	26.29	1.035	5.97	0.235	2.54	0.100	17.78	0.700	5.84	0.230	G2LF : G1 : TLF	6-120
DH3-235/800/100	28.83	1.135	5.97	0.235	2.54	0.100	20.32	0.800	5.84	0.230	G2LF : G1 : TLF	6-120
DH3-235/770/230	31.37	1.235	5.97	0.235	5.84	0.230	19.56	0.770	5.84	0.230	G2LF : G1 : TLF	6-120

DH3-235/900/100	31.37	1.235	5.97	0.235	2.54	0.100	22.86	0.900	5.84	0.230	G2LF : G1 : TLF	6-120
DH3-235/1000/100	33.91	1.335	5.97	0.235	2.54	0.100	25.40	1.000	5.84	0.230	G2LF : G1 : TLF	6-120
DH3-235/1100/100	36.45	1.435	5.97	0.235	2.54	0.100	27.94	1.100	5.84	0.230	G2LF : G1 : TLF	6-120
DH3-235/970/230	36.45	1.435	5.97	0.235	5.84	0.230	24.64	0.970	5.84	0.230	G2LF : G1 : TLF	6-120

Technical Notes	
Contact Material:	Pin: Phosphor Bronze - .025 inch sq pin - burr free both ends
Insulation Material:	Glass Filled Nylon 46 - UL 94V-0 rated - Black (std)
Heat Deflection:	260°C @ 264 PSI per ASTM D648
Insulation Resistance:	5000 MegOhm @ 500VDC
Current Rating:	3 amps continuous @ 100 VDC/contact
Max Processing Temp:	250°C for 60 seconds
Plastic:	High Temperature Plastic
<p><i>INTERCONNECT SYSTEMS INC.</i> 741 Flynn Road, Camarillo, Ca 93012 · (805) 482-2870 · fax (805) 482-8470 · e-mail:info@isipkg.com</p>	