


.100	Header	Single Row	Rt Angle	Surface Mount
-------------	---------------	-------------------	-----------------	----------------------

.100 inch Center - .025 inch Square Pin - Single Row Right Angle SMD Header

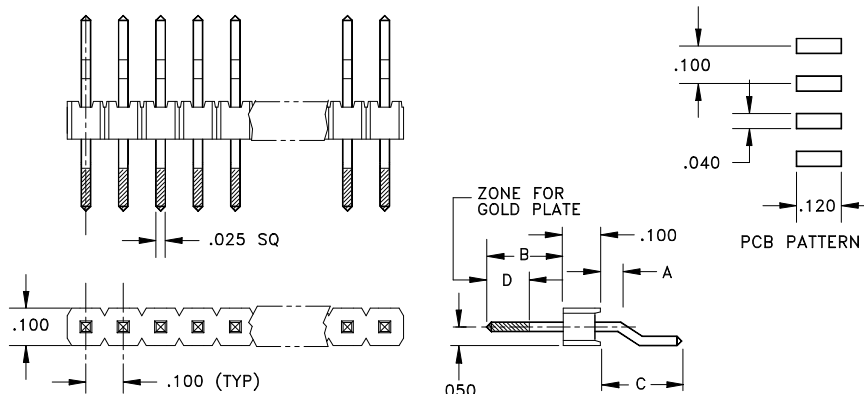

Base Part Number	A		B		C		D		E		Plating Options	Number of Positions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
HTSMRA4300	0.76	0.030	3.30	0.130	4.83	0.190	5.84	0.230			G2LF : TLF	4-20
HTSMRA4301	0.76	0.030	5.84	0.230	5.08	0.200	5.84	0.230			G2LF : TLF	4-20
HTSMRA4302	0.76	0.030	8.38	0.330	5.08	0.200	5.84	0.230			G2LF : TLF	4-20
HTSMRA4314	2.90	0.114	6.81	0.268	5.99	0.236	5.84	0.230			G2LF : TLF	4-20

Technical Notes	
Contact Material:	Pin: Phosphor Bronze - .025 inch sq pin - burr free both ends
Insulation Material:	Glass Filled Nylon 46 - UL 94V-0 rated - Black (std)
Heat Deflection:	260°C @ 264 PSI per ASTM D648
Insulation Resistance:	5000 MegOhm @ 500VDC
Current Rating:	3 amps continuous @ 100 VDC/contact
Max Processing Temp:	250°C for 60 seconds
Plastic:	High Temperature Plastic
INTERCONNECT SYSTEMS INC.	
741 Flynn Road, Camarillo, Ca 93012 · (805) 482-2870 · fax (805) 482-8470 · e-mail: info@isipkg.com	