


Catalog Page 93-2

.100	Jumper	Multile Shunt	Insulated
-------------	---------------	----------------------	------------------

.100 inch Center Microshunt Open & Closed Top Multiple Jumper

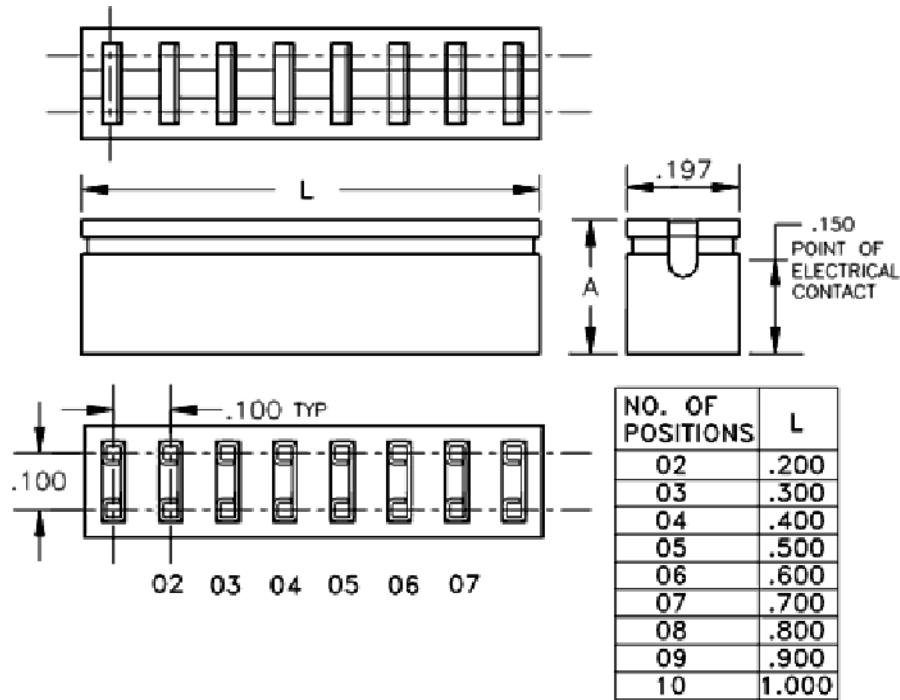

Base Part Number	A		B		C		D		E		Plating Options	Number of Postions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
CCMIJ235-02 Open Top	5.97	0.235									G	OPEN TOP
CCMIJ235-03 Open Top	5.97	0.235									G	OPEN TOP
CCMIJ235-04 Open Top	5.97	0.235									G	OPEN TOP
CCMIJ235-05 Open Top	5.97	0.235									G	OPEN TOP
CCMIJ235-06 Open Top	5.97	0.235									G	OPEN TOP
CCMIJ235-07 Open Top	5.97	0.235									G	OPEN TOP
CCMIJ235-08 Open Top	5.97	0.235									G	OPEN TOP
CCMIJ235-09 Open Top	5.97	0.235									G	OPEN TOP
CCMIJ235-10 Open Top	5.97	0.235									G	OPEN TOP

+

Technical Notes	
Contact Material:	Phosphor Bronze
Insulation Material:	Thermoplastic UL 94V-0 rated
Insulation Resistance:	5000 MegOhm @ 500VDC
Current Rating:	1 amps continuous @ 100 VDC/contact
Max Processing Temp:	125°C for 60 seconds
Insertion Force:	200 grams(7.0oz)
Extraction Force:	120 grams(4.2oz)
<p><i>INTERCONNECT SYSTEMS INC.</i> 741 Flynn Road, Camarillo, Ca 93012 · (805) 482-2870 · fax (805) 482-8470 · e-mail:info@isipkg.com</p>	