

4

3

2

DWG NO. 1 POGO-PIN-15.4-4


These drawings and specifications are the property of Interconnect Systems, Inc., and shall not be reproduced, or copied, or used without prior written permission.

REVISION HISTORY

REV	DESCRIPTION	ECN	DATE	APRVD
1	INITIAL RELEASE	--	03/27/18	JAG

D
C
B
A

D
C
B
A

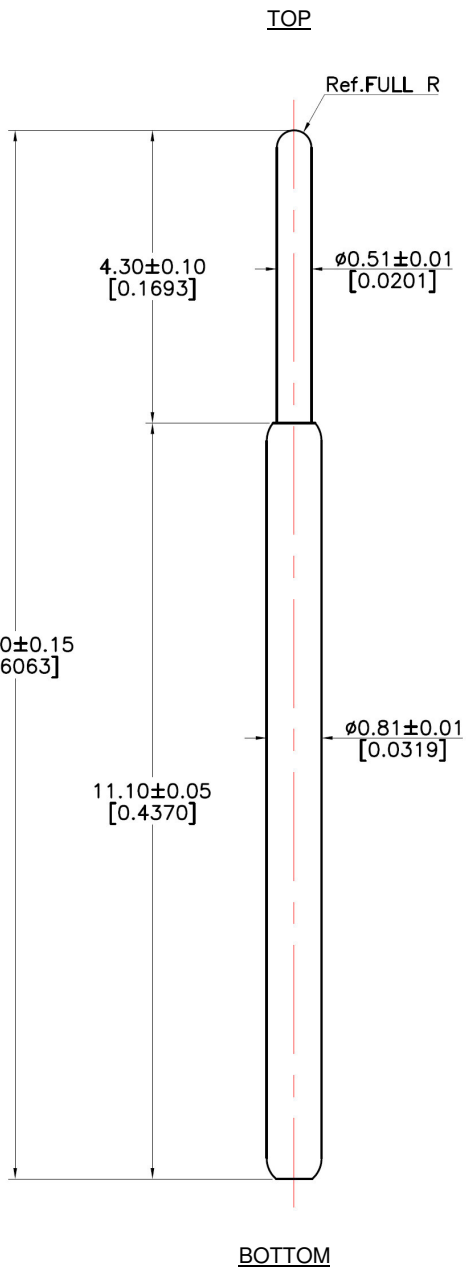

Pointing Accuracy: ± 0.05 mm
 Spring Force: ± 20%

STATE	TRAVEL	SPRING FORCE
Initial Travel	--	10.6g (0.375oz)
Recommended Travel	2.30mm (0.0906")	60.0g (2.115oz)
Full Travel	3.00mm (0.1181")	74.5g (2.628oz)


PART	MATERIAL	FINISH
Plunger [Top]	Hardened Beryllium Copper	Gold Plated
Barrel	Phosphor Bronze	Gold Plated
Spring	Music Wire	Gold Plated

4

3

2

1

CONTRACT NO. SO 28059				INTERCONNECT SYSTEMS INC. a molex company 741 FLYNN ROAD, CAMARILLO, CALIFORNIA 93012	
DRAWN BY R. FLORES	DATE 02/07/18	TITLE POGO PIN			
DESIGNER ET	DATE 02/07/18	1.00mm Pitch, C Plunger, 60.0g SF, Au Plate Finish			
CHECKER J. GELACIO	DATE 03/27/18	SIZE A	RoHS	SCALE N/A	DRAWING NO. POGO-PIN-15.4-4
QA N/A	DATE	SAVED AS: POGO-PIN-15.4-4.PDF	FINISHED ASSY: --	REV 1	SHEET 1 OF 1
PROCESS ENG. N/A	DATE				