


REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	06/14/05	H.N.

SKT2324

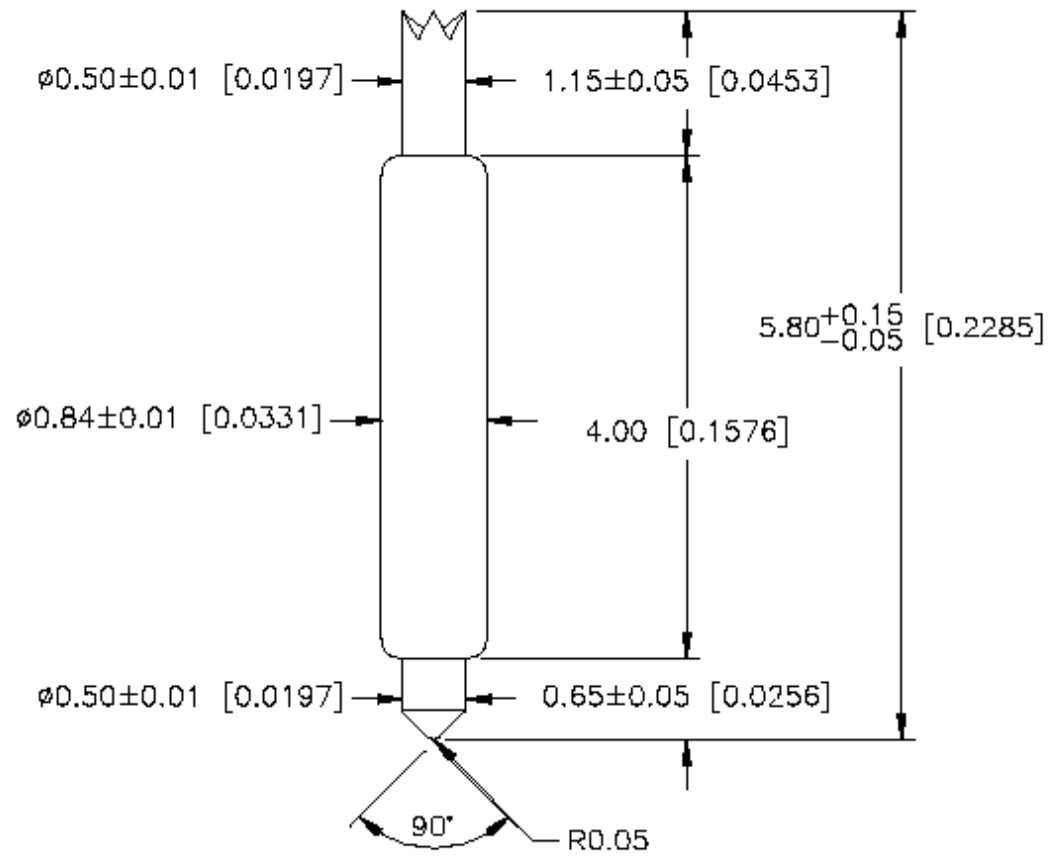


Unit : Millimeter[inch]

Spring force

- 13.80g(0.487oz) at initial travel
- 30.60g(1.079oz) at 0.70mm(0.0276) recommended travel
- 37.80g(1.333oz) at 1.05mm(0.0413) full travel

Material & Finish

- Plunger Hardened Beryllium copper / Gold Plated
- Barrel Phospher Bronze / Gold Plated
- Spring Music Wire / Gold Plated

ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED			
		Emulation Technology, Inc. — VLSI and SMT ADAPTERS and ACCESSORIES —	
		2344 Walsh Avenue, Bldg.F Santa Clara, Ca 95051	
TEL:(408)982-0660 FAX:(408)982-0664			
SHEET: 1 OF 1	DATE: 06/14/05	REVISION: A	ASSEMBLY DRAWING
CHECKED: Perry Munroe	DRAWN: Huy Nguyen		
Scale N/A	DO NOT SCALE DRAWING		ITEM: POGO-PIN-5.80-2
			DESCRIPTION: POGO-PIN-5.80-2