


REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	07/11/06	H.N.
B	ADDED DIMENSION $\phi.037$	11/30/06	H.N.

SKT2496

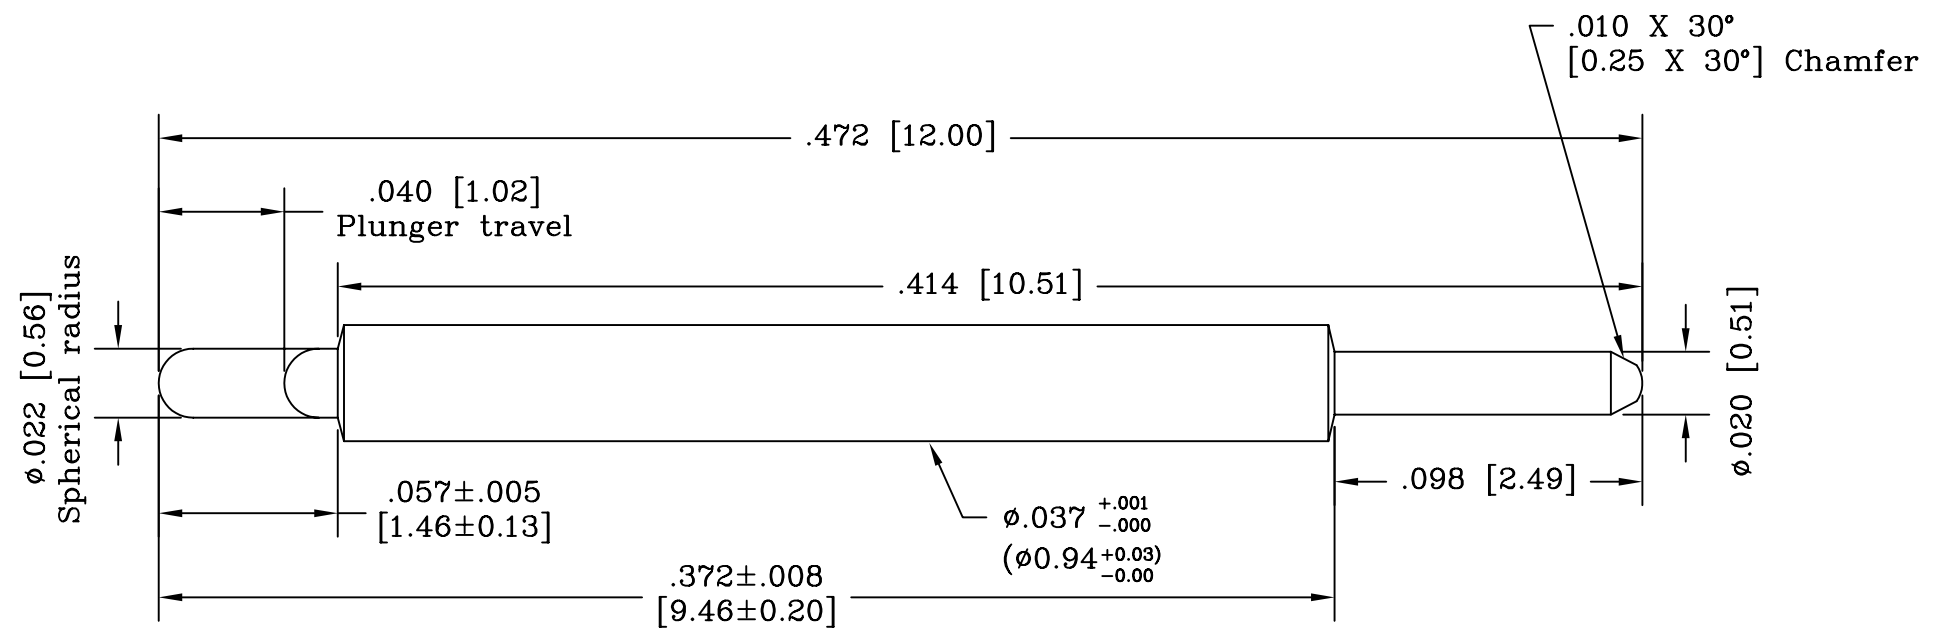

Probe Specifications

Mechanical

Full Travel: .057 (1.48)
 Recommended Working Travel: .040 (1.02)
 Mechanical Life Exceeds: 100,000 cycles

Operating Temperature -35°C to +105°C
 Consult factory for other temperature requirements,
 and applications below -40°

Electrical (Static Conditions)
 Current Rating: 5 amps continuous

Probe Resistance 50 milliohms

Materials and Finishes

Plunger: Brass, gold plated
 Barrel: Brass, gold plated
 Spring: Music wire, gold plated
 Spring Force in Oz. (grams)
 Spring Type Preload Working Travel
 As shown .83 (23.55) 2.85 (80.87)

ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED			
		Emulation Technology, Inc.	
		— VLSI and SMT ADAPTERS and ACCESSORIES —	
		2344 Walsh Avenue, Bldg.F Santa Clara, Ca 95051	TEL:(408)982-0660 FAX:(408)982-0664
SHEET: 1 OF 1	DATE: 07/11/06	REVISION: B	ASSEMBLY DRAWING
CHECKED: Perry Munroe		DRAWN: Huy Nguyen	
Scale N/A		DO NOT SCALE DRAWING	
			ITEM: POGO-PIN-12.0-1
			DESCRIPTION: POGO-PIN-12.0-1