


REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	01/05/10	JAG

SKT3381

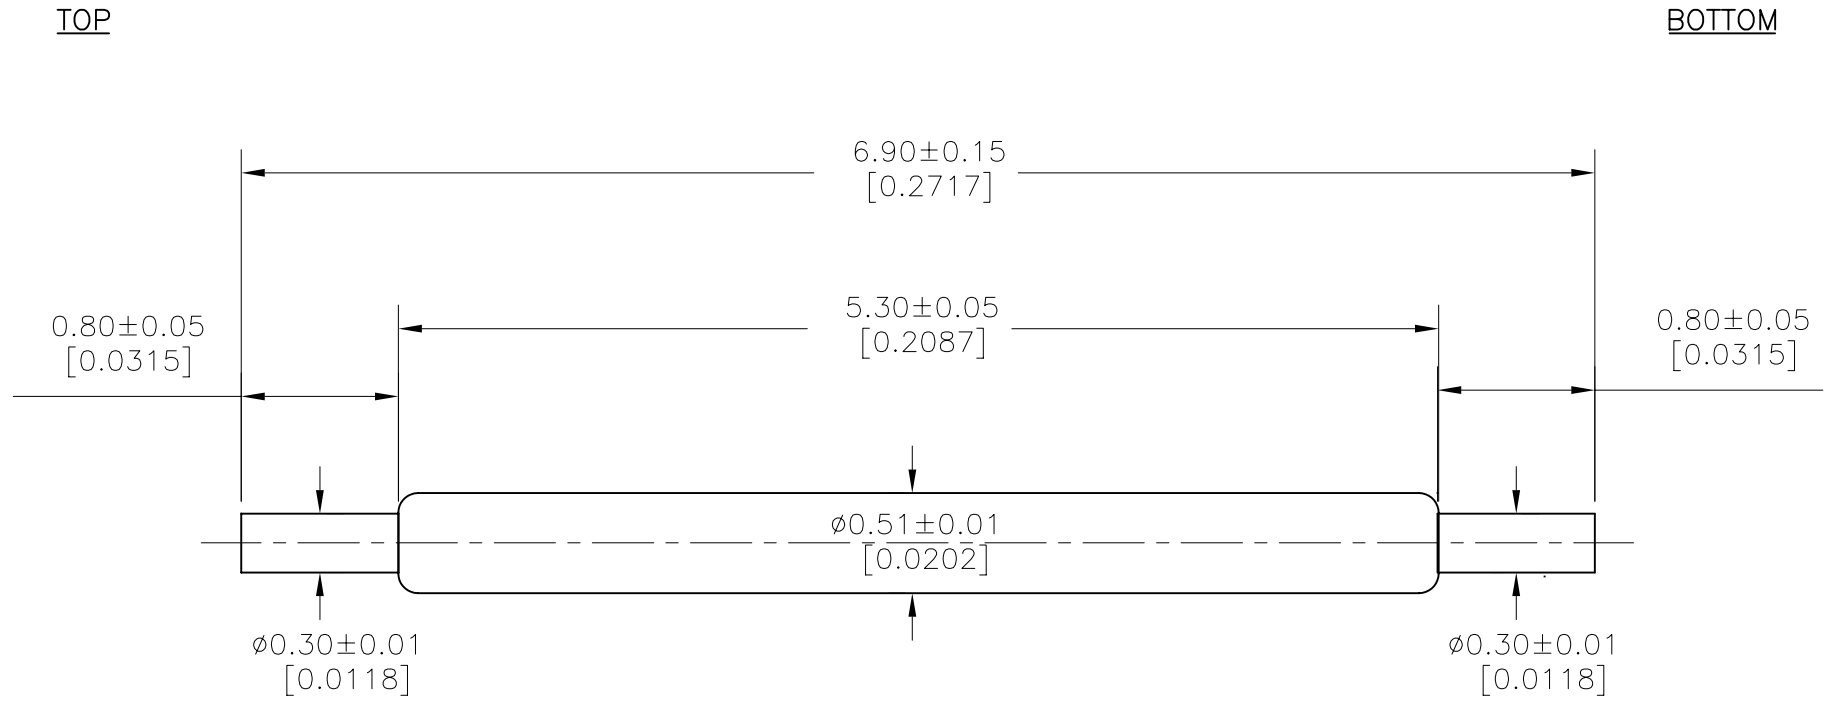

POINTING ACCURACY:  $\pm 0.05$ mm

SPRING FORCE: [  $\pm 20\%$  ]


- 6.0g (0.212oz) AT INITIAL TRAVEL
- 24.6g (0.868oz) AT 1.10mm (0.0433) RECOMMENDED TRAVEL
- 33.1g (1.168oz) AT 1.60mm (0.0630) FULL TRAVEL

CRES

AVG = 300mOhm  
STDDEV = 50mOhm

MATERIAL & FINISH

- PLUNGER (x2) HARDENED BERYLLIUM COPPER / GOLD PLATED
- BARREL PHOSPHOR BRONZE / GOLD PLATED
- SPRING MUSIC WIRE / GOLD PLATED

ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED			
		<b>EMULATION TECHNOLOGY, INC.</b> — VLSI and SMT ADAPTERS and ACCESSORIES —	
		759 FLYNN ROAD CAMARILLO, CA 93012	TEL: (805) 383-8480 FAX: (805) 383-8484
SHEET: 1 OF 1	DATE: 01/05/10	REVISION: A	<b>ASSEMBLY DRAWING</b>
CHECKED:		DRAWN: J. GELACIO	ITEM: POGO-PIN-6.90-1
DO NOT SCALE DRAWING			DESCRIPTION: POGO-PIN-6.90-1