


REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	04/21/11	JAG

SKT3632

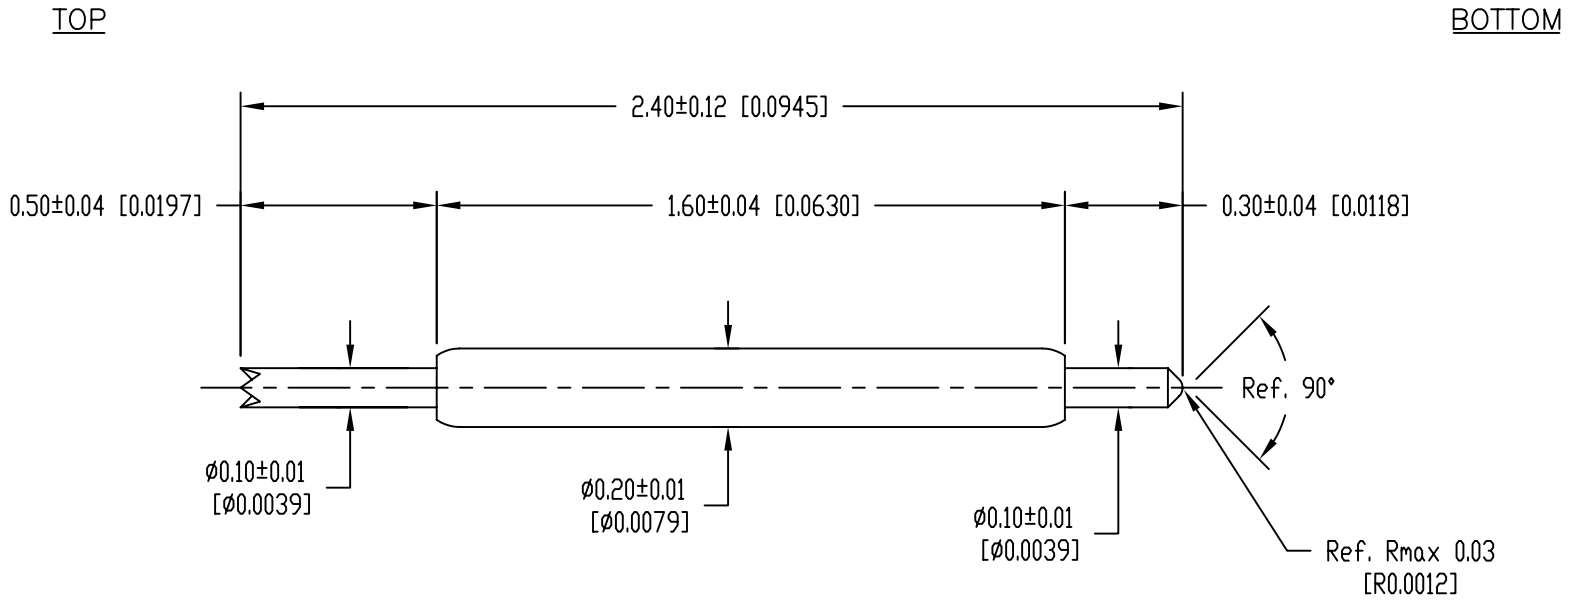

MINIMUM PITCH: 0.25mm

SPRING FORCE: 12.8g (0.451oz) @ 0.35mm (0.0138in)  
 RECOMMENDED TRAVEL: 0.35mm (0.0138in)  
 FULL TRAVEL: 0.45mm (0.0177in)

PART	MATERIAL	FINISH
PLUNGER (TOP)	HARDENED BeCu	GOLD PLATED
PLUNGER (BOTTOM)	HARDENED BeCu	GOLD PLATED
BARREL	Ni-Au ALLOY	GOLD PLATED
SPRING	MUSIC WIRE	GOLD PLATED

SCALE 2:1

UNLESS OTHERWISE SPECIFIED:  
 DIMENSIONS ARE IN MILLIMETERS  
 TOLERANCES ARE:  
 DECIMALS:            ANGULAR:  
 X.X ±0.100MM        X.X ±1.0°  
 X.XX ±0.050MM      X.XX ±0.5°  
 X.XXX ±0.025MM

ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED

**EMULATION TECHNOLOGY, INC.**  
 — VLSI and SMT ADAPTERS and ACCESSORIES —  
 759 FLYNN ROAD                      TEL: (805) 383-8480  
 CAMARILLO, CA 93012                FAX: (805) 383-8484

SHEET: 1 OF 1	DATE: 04/21/11	REVISION: <b>A</b>	<b>ASSEMBLY DRAWING</b>
CHECKED:		DRAWN: J. GELACIO	ITEM: POGO-PIN-2.40-1
DO NOT SCALE DRAWING			DESCRIPTION: POGO-PIN-2.40-1