


REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	02/20/15	JAG

SKT4135

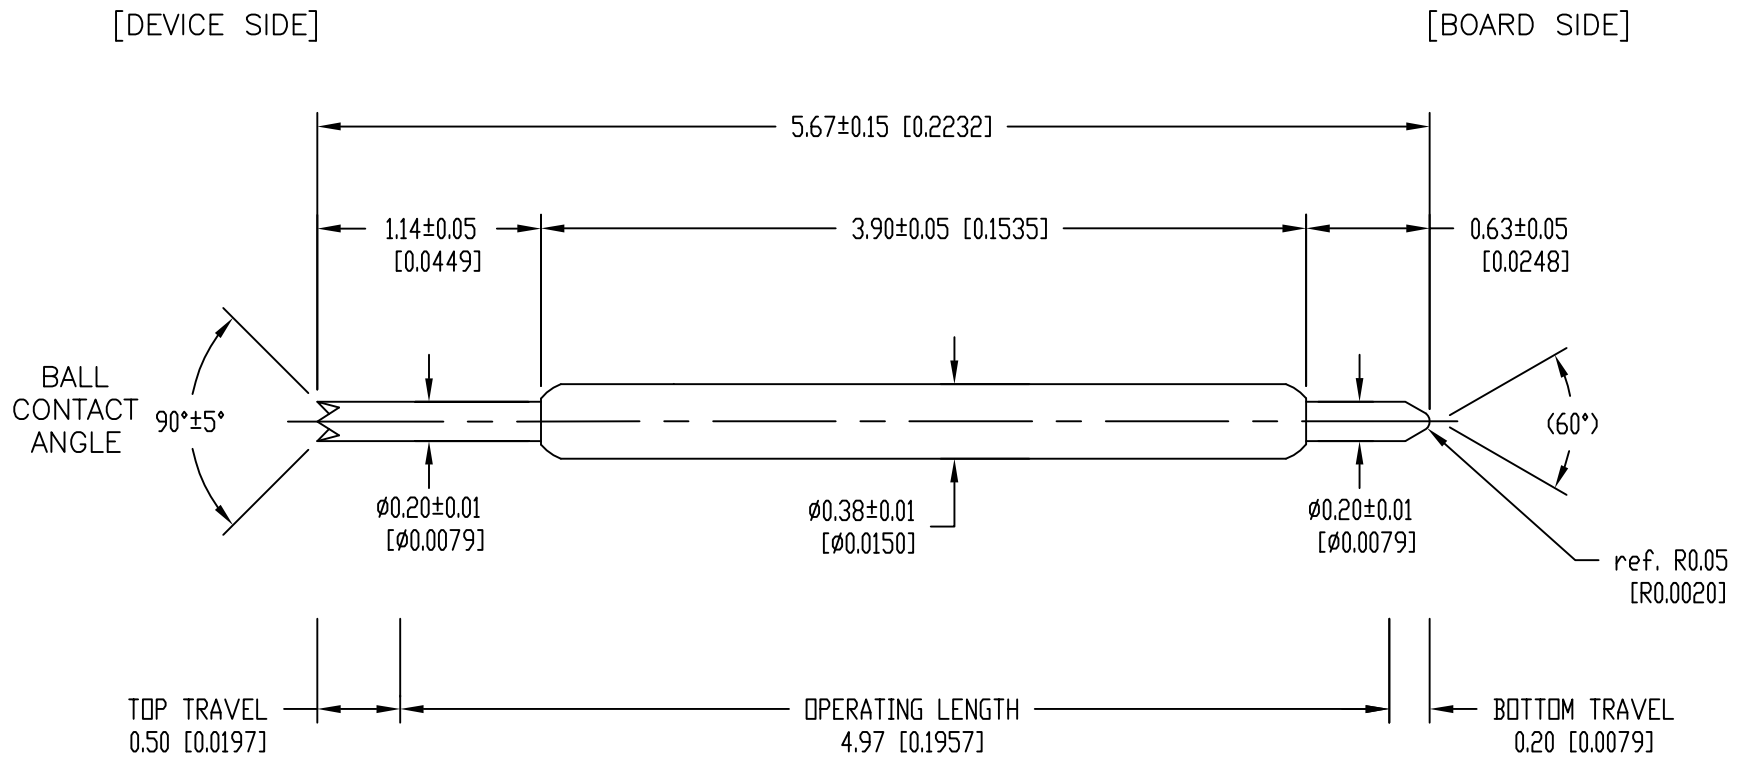

NOTICE: 0.20mm OR MORE OF PRELOAD AT BOTTOM SIDE IS A MUST FOR PIN DURABILITY WHEN SET IN DUT BOARD.

POINTING ACCURACY: ±0.05mm

SPRING FORCE [±20%]
 6.4g (0.227oz) at INITIAL TRAVEL
 25.0g (0.882oz) at 0.70mm (0.0276) RECOMMENDED TRAVEL
 30.9g (1.089oz) at 0.95mm (0.0374) FULL TRAVEL

PART	MATERIAL	FINISH
PLUNGER (DEVICE SIDE)	HARDENED BERYLLIUM COPPER	/GOLD PLATED
PLUNGER (BOARD SIDE)	HARDENED BERYLLIUM COPPER	/GOLD PLATED
BARREL	PHOSPHOR BRONZE	/GOLD PLATED
SPRING	STAINLESS STEEL	/GOLD PLATED

ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED

EMULATION TECHNOLOGY, INC.
 — VLSI and SMT ADAPTERS and ACCESSORIES —

759 FLYNN ROAD
 CAMARILLO, CA 93012

TEL: (805) 383-8480
 FAX: (805) 383-8484

SHEET: 1 OF 1	DATE: 02/20/15	REVISION: A	ASSEMBLY DRAWING
CHECKED:	DRAWN: J. GELACIO	ITEM: POGO-PIN-5.67-4	DESCRIPTION: POGO-PIN-5.67-4
DO NOT SCALE DRAWING			