


REV	DESCRIPTION	DATE	BY
A	NEW DRAWING	5/11/15	TF

SKT4157

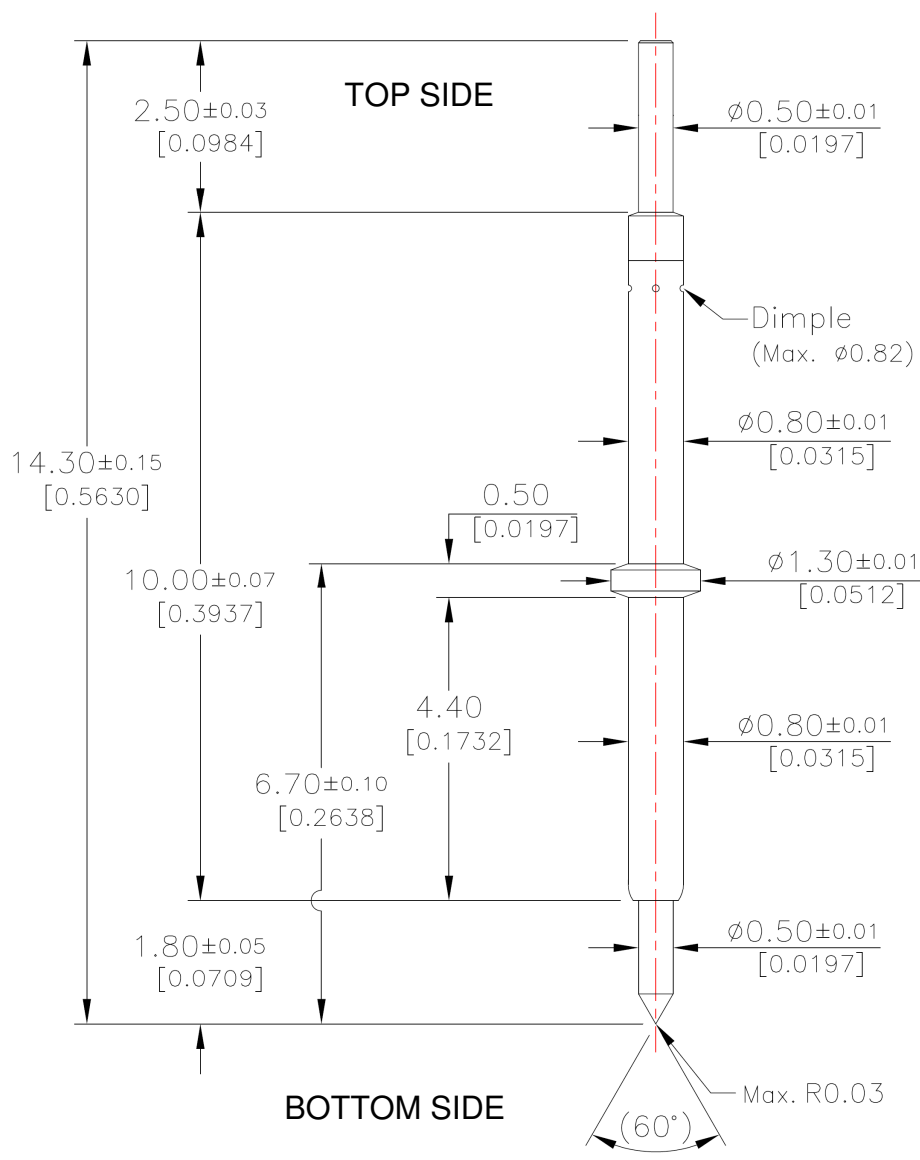

**Pointing Accuracy:** ± 0.05 mm

**Spring Force [+2g/-1g]**

- 2.0g (0.069oz) at initial travel
- 3.0g (0.105oz) at 0.50mm (0.0197") recommended travel
- 4.0g (0.141oz) at 1.00mm (0.0394") full travel

**Material & Finish**

Terminal (Top side)	Hardened Beryllium Copper	/	Gold Plated
Plunger (Bottom side)	Brass	/	Gold Plated
Barrel	Brass	/	Gold Plated
Spring	Stainless Steel	/	Gold Plated

UNLESS OTHERWISE SPECIFIED:  
 DIMENSIONS ARE IN MILLIMETERS  
 SURFACE FINISH:  
 GENERAL TOLERANCES: ±0.10  
 LINEAR:  
 ANGULAR:

ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED

**EMULATION TECHNOLOGY, INC.**  
 VLSI and SMT ADAPTERS and ACCESSORIES

759 FLYNN ROAD  
 CAMARILLO, CA 93012

TEL: (805) 383-8480  
 FAX: (805) 383-8484

SHEET: 1 OF 1	DATE: 5/11/15	REVISION: A	<b>ASSEMBLY DRAWING</b>
CHECKED:	PREPARED BY: T. FOOTE	ITEM: POGO-PIN-14.3-1	
DO NOT SCALE DRAWING			DESCRIPTION: POGO-PIN-14.3-1