


| REV | DESCRIPTION | DATE | BY |
|-----|-------------|----------|----|
| A | NEW DRAWING | 12/17/15 | TF |

SKT4221

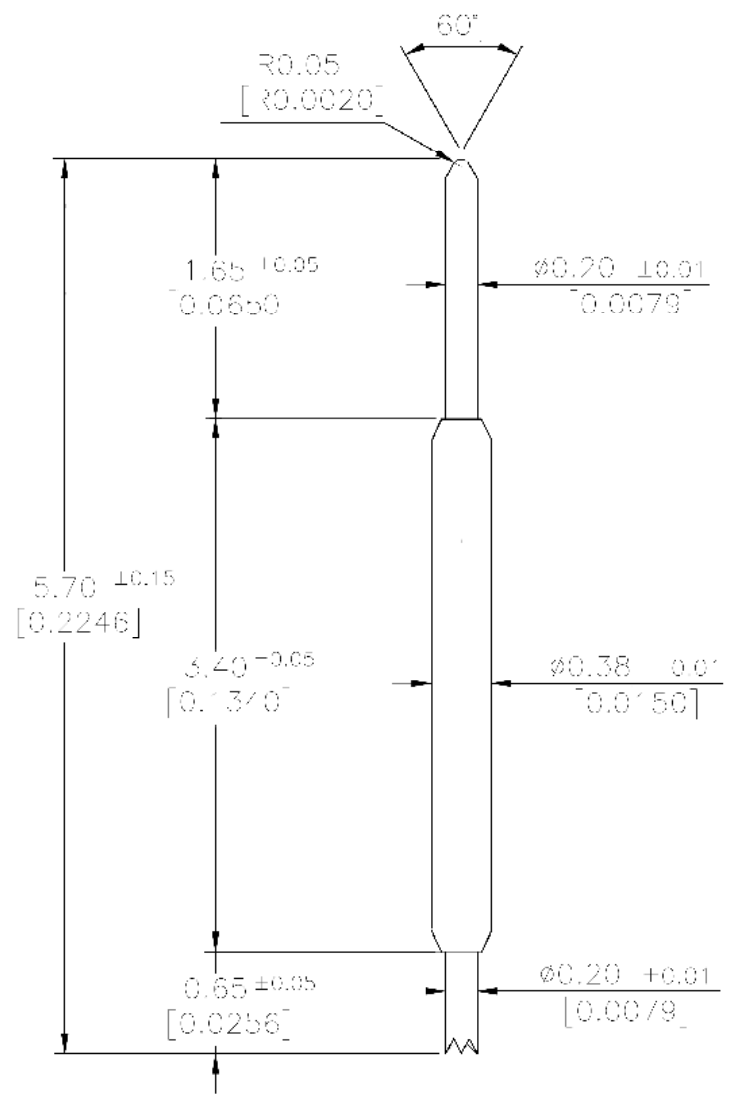

Unit : Millimeter[inch]


Pointing accuracy : ± 0.085 mm

Spring force [±20%]

- 12.7g(0.448oz) at initial travel
- 30.0g(1.058oz) at 0.75mm(0.0295) recommended travel
- 31.0g(1.093oz) at 0.80mm(0.0315) full travel

Material & Finish

| | | |
|---------|---------------------------|---------------|
| Plunger | Hardened Beryllium copper | / Gold Plated |
| Barrel | Phosphor Bronze | / Gold Plated |
| Spring | Music wire | / Gold Plated |

| | | | |
|---|-------------------|--|--|
| ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED | | | |
|  | | EMULATION TECHNOLOGY, INC. VLSI and SMT ADAPTERS and ACCESSORIES | |
| | | 759 FLYNN ROAD CAMARILLO, CA 93012 | TEL: (805) 383-8480 FAX: (805) 383-8484 |
| SHEET: 1 OF 1 | DATE: 12/17/15 | REVISION: A | ASSEMBLY DRAWING |
| CHECKED: | | PREPARED BY: T. FOOTE | ITEM: POGO-PIN-5.70-F |
| DO NOT SCALE DRAWING | | | DESCRIPTION: POGO-PIN-5.70-F |