


2mm	Socket	Double Row	Straight	Thru Hole
-----	--------	------------	----------	-----------

2mm Center, Double Row Straight Socket

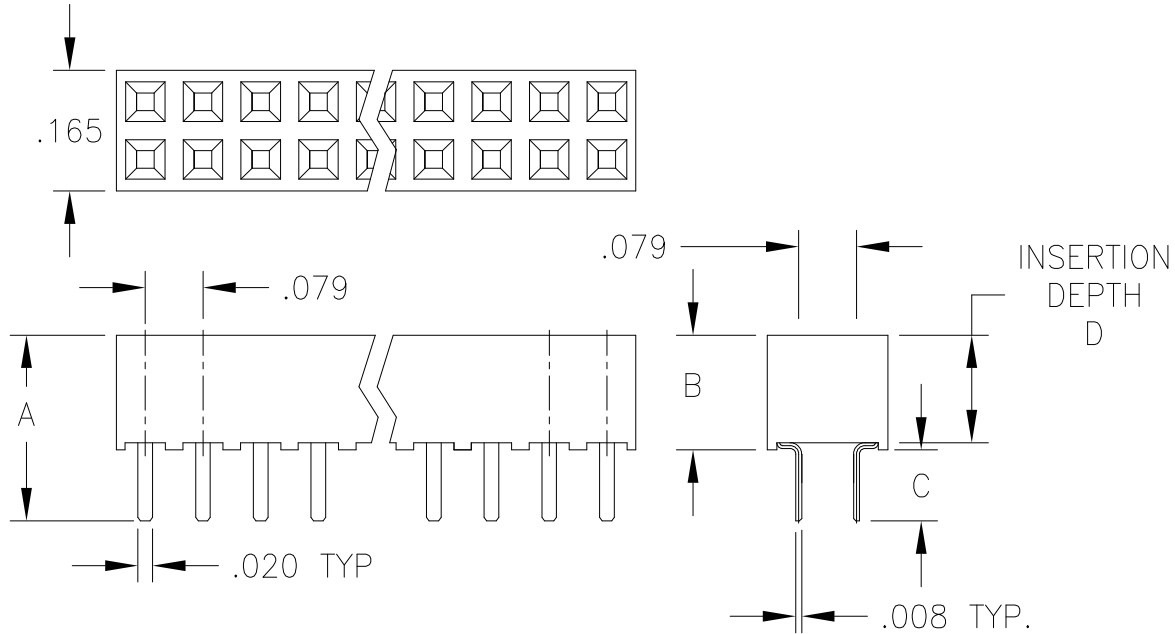

Base Part Number	A		B		C		D		E		Plating Options	Number of Postions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
1321	5.13	0.202	3.99	0.157	1.14	0.045	3.68	0.145			G2LF : TLF	4-100
1320	6.53	0.257	3.99	0.157	2.54	0.100	3.68	0.145			G2LF : TLF	4-100
1319	7.04	0.277	3.99	0.157	3.05	0.120	3.68	0.145			G2LF : TLF	4-100

Technical Notes	
Contact Material:	Contact: Stamped, Phosphor Bronze
Insulation Material:	Glass Filled Nylon 46 - UL 94V-0 rated - Black (std)
Heat Deflection:	260°C @ 264 PSI per ASTM D648
Insulation Resistance:	5000 MegOhm @ 500VDC
Current Rating:	1 amps continuous @ 100 VDC/contact
Max Processing Temp:	250°C for 60 seconds
Insertion Force:	142 grams (5.0oz) (typ initial w/ .020" sq pin)
Extraction Force:	80 grams (2.8oz) (typ initial w/ .020" sq pin)
Plastic:	High Temperature Plastic
INTERCONNECT SYSTEMS INC.	
741 Flynn Road, Camarillo, Ca 93012 · (805) 482-2870 · fax (805) 482-8470 · e-mail: info@isipkg.com	