


2mm	Socket	Double Row - Press Fit	Straight	Thru Hole
-----	--------	------------------------	----------	-----------

2mm Center - Double Row Straight - Press Fit Socket

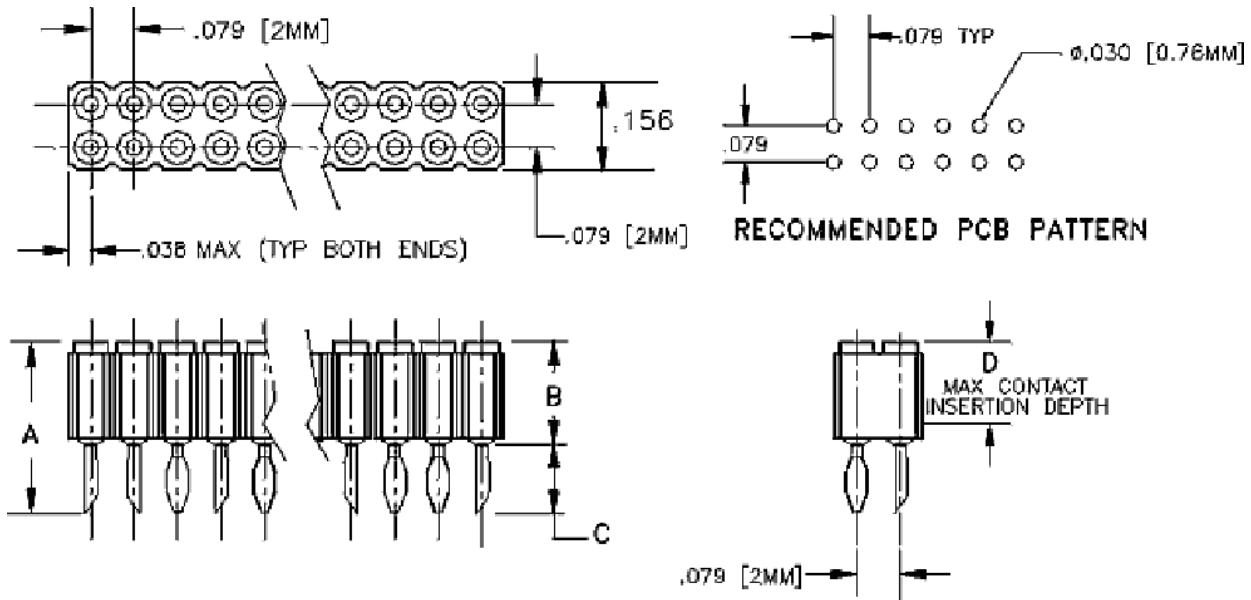

Base Part Number	A		B		C		D		E		Plating Options	Number of Postions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
<b>1250C</b> 2 row	8.00	0.315	4.57	0.180	3.43	0.135	3.81	0.150			G1	4-80

Technical Notes	
<b>Contact Material:</b>	Shell: Phosphor Bronz, Contact Clip: BeCu spring
<b>Insulation Material:</b>	Glass Filled Nylon 46 - UL 94V-0 rated - Black (std)
<b>Heat Deflection:</b>	260°C @ 264 PSI per ASTM D648
<b>Insulation Resistance:</b>	5000 MegOhm @ 500VDC
<b>Current Rating:</b>	1 amps continuous @ 100 VDC/contact
<b>Max Processing Temp:</b>	250°C for 60 seconds
<b>Insertion Force:</b>	Typ initial per: 175 grams (6.2oz) w/.020" rd pin & 143 grams (5.0oz) w/.018" rd pin
<b>Extraction Force:</b>	Typ initial per: 103 grams (3.6oz) w/.020" rd pin & 84 grams (3.0oz) w/.018" rd pin
<b>Plastic:</b>	High Temperature Plastic
<b>INTERCONNECT SYSTEMS INC.</b>	
741 Flynn Road, Camarillo, Ca 93012 · (805) 482-2870 · fax (805) 482-8470 · e-mail: <a href="mailto:info@isipkg.com">info@isipkg.com</a>	