


2mm	Socket	4 Row Stacking Socket - Screw Machine Contact, Round pin"	4 Row	Thru Hole
-----	--------	---	-------	-----------

Screw Machine Contact version of the PC104Plus Connectors - 120 position - 4Row

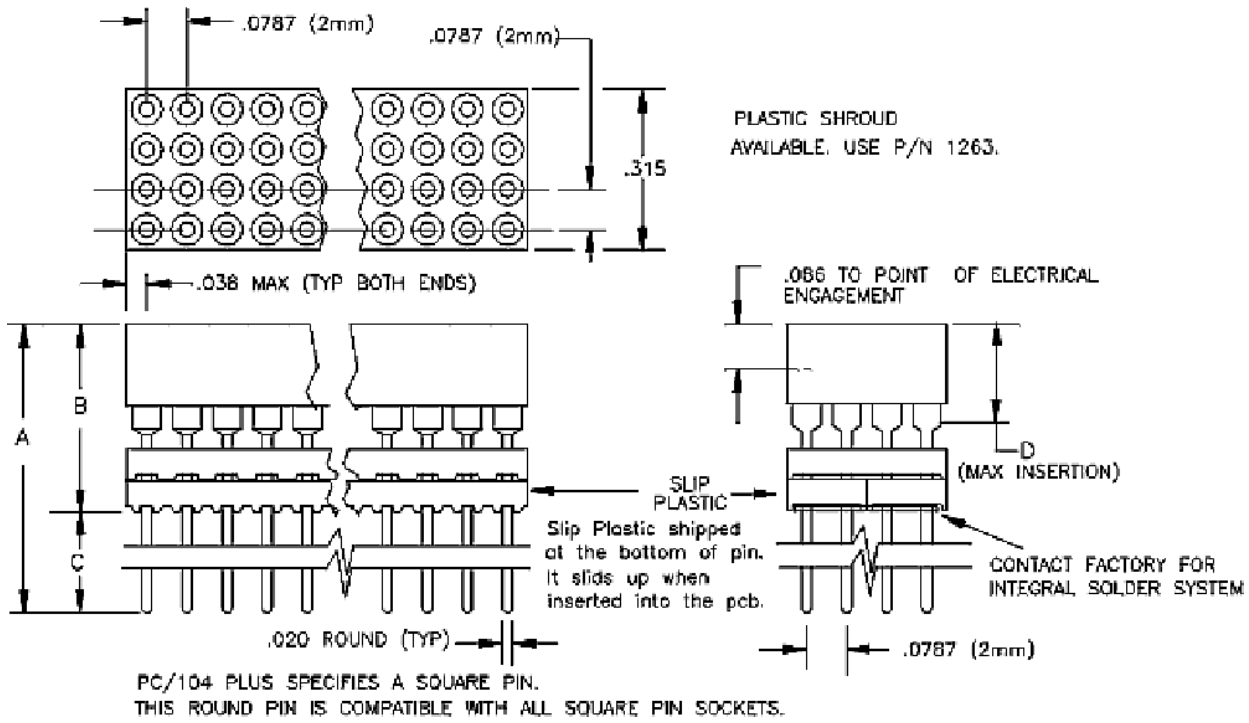

Base Part Number	A		B		C		D		E		Plating Options	Number of Postions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
1264-120 Shroud only											X	Plastic only
1261 Non-Stack	11.68	0.460	9.35	0.368	2.34	0.092	5.08	0.200			G2LF	16-120
1262 Stackthrough	21.34	0.840	9.35	0.368	11.99	0.472	5.08	0.200			G	16-120

Technical Notes	
Contact Material:	Shell: Phosphor Bronz - Contact Clip: 6 finger BeCu [#32]
Insulation Material:	Glass Filled Nylon 46 - UL 94V-0 rated - Black (std)
Heat Deflection:	260°C @ 264 PSI per ASTM D648
Insulation Resistance:	5000 MegOhm @ 500VDC
Current Rating:	1 amps continuous @ 100 VDC/contact
Max Processing Temp:	250°C for 60 seconds
Insertion Force:	Typ initial: 160 grams(5.6oz) w/.020" rd pin 209 grams(7.4oz) w/.020" sq pin [#32]
Extraction Force:	Typ initial: 97 grams(3.4oz) w/.020" rd pin 116 grams(4.1oz) w/.020" sq pin [#32]
Plastic:	High Temperature Plastic
<p><i>INTERCONNECT SYSTEMS INC.</i> 741 Flynn Road, Camarillo, Ca 93012 · (805) 482-2870 · fax (805) 482-8470 · e-mail:info@isipkg.com</p>	