


2mm	Header	6 Row .800 inch Stackthrough - screw machine contact	6 Row	Thru Hole
-----	--------	--	-------	-----------

.800 board centerline - 6 Row End of Stack Header

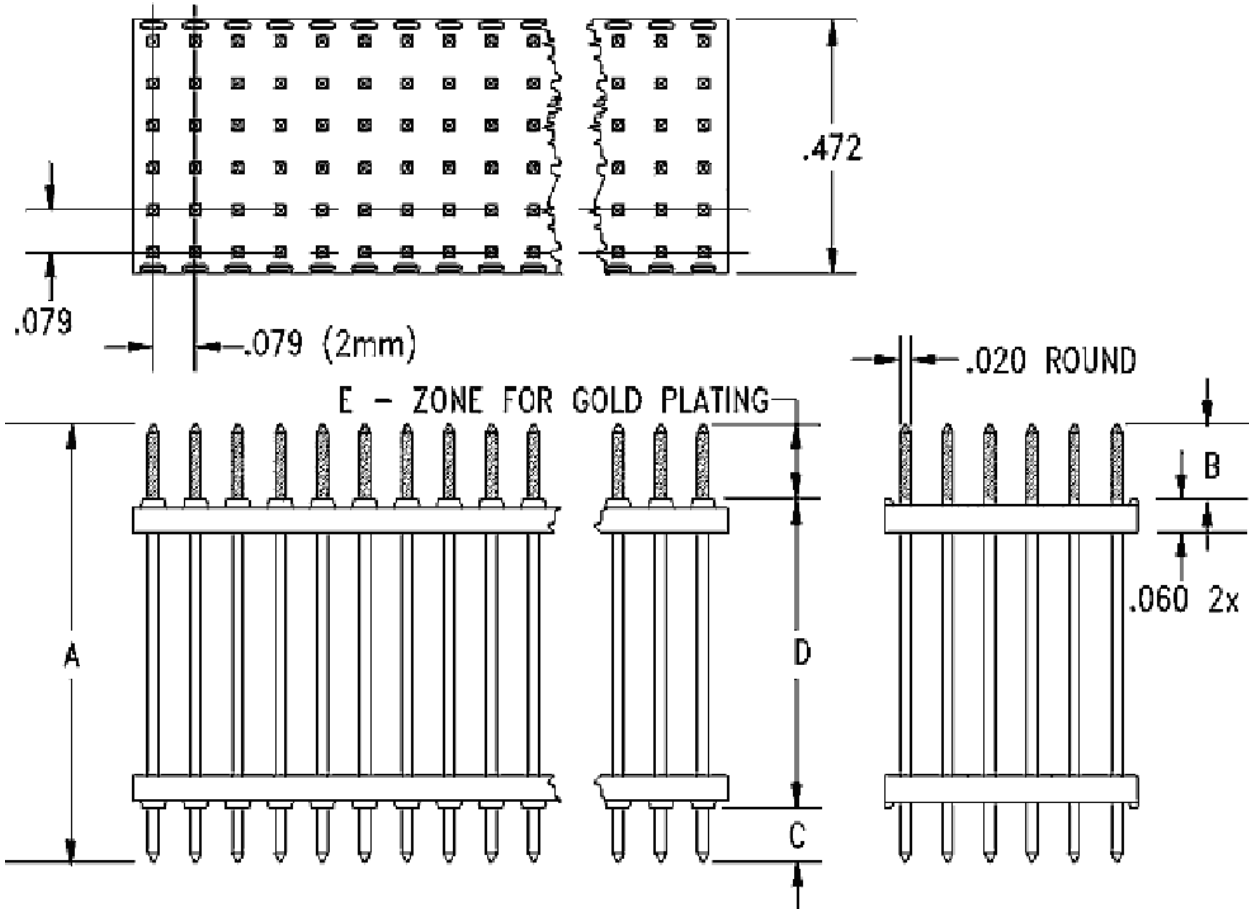

Base Part Number	A		B		C		D		E		Plating Options	Number of Positions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
1295	20.70	0.815	3.56	0.140	2.54	0.100	14.60	0.575	3.56	0.140	G2LF	48-150

Technical Notes	
Contact Material:	Pin: Phosphor Bronze - .020" round.
Insulation Material:	Glass Filled Nylon 46 - UL 94V-0 rated - Black (std)
Heat Deflection:	260°C @ 264 PSI per ASTM D648
Insulation Resistance:	5000 MegOhm @ 500VDC
Current Rating:	2 amps continuous @ 100 VDC/contact
Max Processing Temp:	250°C for 60 seconds
Plastic:	High Temperature Plastic
INTERCONNECT SYSTEMS INC.	
741 Flynn Road, Camarillo, Ca 93012 · (805) 482-2870 · fax (805) 482-8470 · e-mail: info@isipkg.com	