


.100	Socket	Single Row – Stacking	Straight	OK for PC/104
-------------	---------------	------------------------------	-----------------	----------------------

.100" Center – Single Row socket – use with PC/104 and for .800" centerline boards.

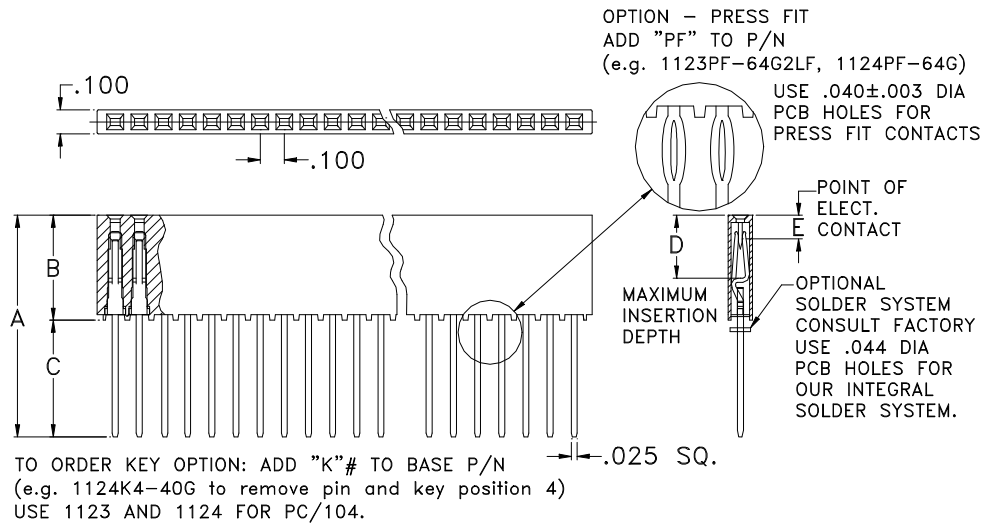

Base Part Number	A		B		C		D		E		Plating Options	Number of Positions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
1123 for PC/104	13.84	0.545	11.05	0.435	2.79	0.110	6.53	0.257	2.26	0.089	G2LF	2-32
1123PF for PC/104	15.32	0.603	11.05	0.435	4.27	0.168	6.53	0.257	2.26	0.089	G2LF	2-32
1121	16.89	0.665	14.10	0.555	2.79	0.110	6.10	0.240	1.75	0.069	G2LF	2-32
1124 for PC/104	23.29	0.917	11.05	0.435	12.24	0.482	6.53	0.257	2.26	0.089	G	2-32
1124PF for PC/104	23.29	0.917	11.05	0.435	12.24	0.482	6.53	0.257	2.26	0.089	G	2-32
1126	24.59	0.968	14.10	0.555	10.49	0.413	6.10	0.240	1.75	0.069	G	2-32
1126A	24.59	0.968	11.56	0.455	13.03	0.513	6.10	0.240	1.75	0.069	G	2-32

Technical Notes	
Contact Material:	Contact: Stamped – Phosphor Bronze – DIN dual beam
Insulation Material:	Thermoplastic - UL 94V-0 rated – Black
Temperature Range:	-65°C to 250°C
Insulation Resistance:	5000 MegOhm @ 500VDC
Current Rating:	3 amps continuous @ 100 VDC/contact
Max Processing Temp:	250°C for 60 seconds
Plastic:	High Temperature Plastic
INTERCONNECT SYSTEMS INC.	
741 Flynn Road, Camarillo, Ca 93012 · (805) 482-2870 · fax (805) 482-8470 · e-mail: info@isipkg.com	