


.100	Socket	Double Row – Straddle Mount	Straight	Thru Hole
-------------	---------------	------------------------------------	-----------------	------------------

.100" Center – Double Row Straight – Straddle Mount - accepting .025 inch Square Pin - Socket

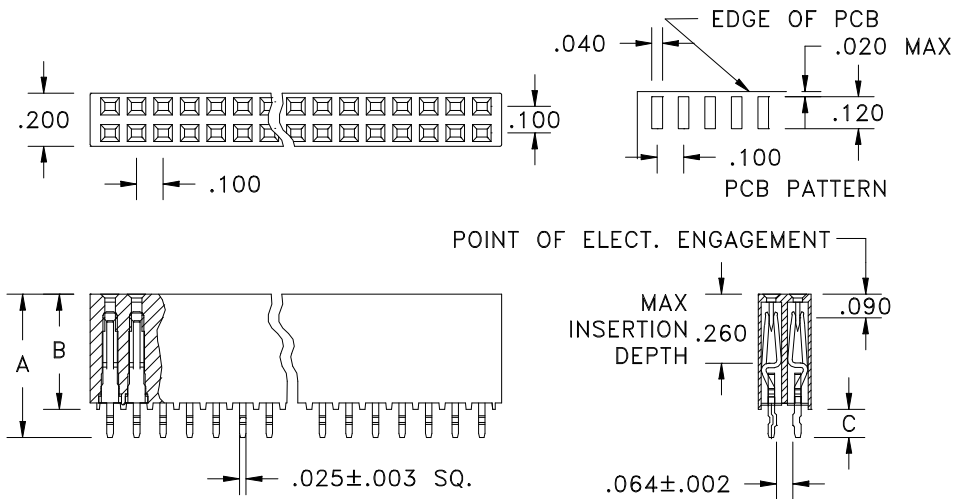

Base Part Number	A		B		C		D		E		Plating Options	Number of Positions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
1129	13.72	0.540	11.05	0.435	2.67	0.105					G2LF	4-64

Technical Notes	
Contact Material:	Contact: Stamped - Phosphor Bronze – DIN dual beam
Insulation Material:	Glass Filled Nylon 46 - UL 94V-0 rated - Black (std)
Temperature Range:	-65°C to 250°C
Insulation Resistance:	5000 MegOhm @ 500VDC
Current Rating:	3 amps continuous @ 100 VDC/contact
Max Processing Temp:	250°C for 60 seconds
Plastic:	High Temperature Plastic
INTERCONNECT SYSTEMS INC.	
741 Flynn Road, Camarillo, Ca 93012 · (805) 482-2870 · fax (805) 482-8470 · e-mail: info@isipkg.com	