


THIS DRAWING CONTAINS PROPRIETARY INFORMATION EXCLUSIVE TO CDMM CON CONNECTORS, AND SHALL NOT BE USED, DUPLICATED OR DISCLOSED IN WHOLE OR IN PART FOR THE MANUFACTURE, PROCUREMENT OR OTHER PURPOSES EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY CDMM CON WORLDWIDE, INC.

REVISIONS

ECO NO:	REV:	DESCRIPTION	DATE	APPROVED
91XXX	A	UPDATED	07.13.06	

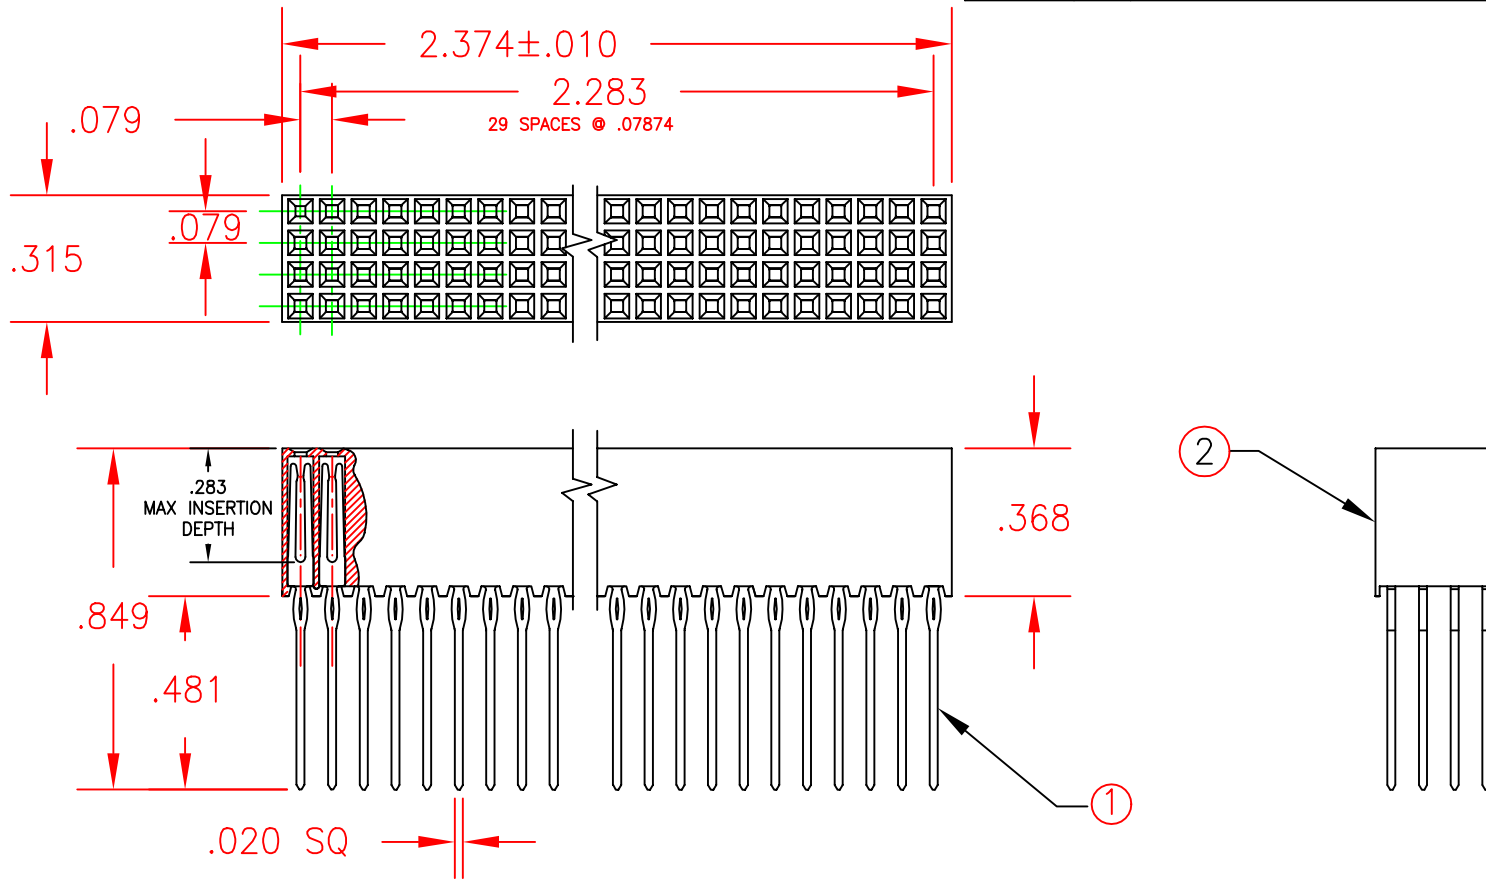

3. MAX NUMBER OF CONTACTS: 120
2. PLATING: G GOLD FLASH PLATE PER MIL-G-45204 TYPE II OVER NICKEL PLATE PER QQ-N-290, .000050 MIN.
1. MATERIALS: INSULATORS – BLACK, 30% GLASS FILLED THERMOPLASTIC, 94V-0, RATED -65°C TO 250 °C RoHS COMPLIANT XYDAR LCP RESIN: G-930
CONTACT – PHOSPHOR BRONZE, ALLOY 51000

NOTES: UNLESS OTHERWISE SPECIFIED

FIND	QTY	PART NO.	DESCRIPTION
2	1	40343	2MM P, INSULATOR 4 ROW STAMPED SKT
1	A/R	P40683-02	2MM TUNING FORK SOCKET

LIST OF MATERIALS

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: FRACTIONS DECIMALS ANGLES $\pm 1/64$.XX $\pm .02$.XXX $\pm .010$ $\pm 1^\circ$		TITLE: 2MM P, 4 ROW STAMPED SOCKET PC/104-PLUS W/SHROUD,PRESS FIT	
DRAWN BY: AM	DATE: 02.22.01	CAT. NO: 1242PF-XXYY	SIZE: DWG NO: A 30572
APPROVED:	DATE:	MATERIAL: SEE NOTE 1	REV: A
FINISH: SEE NOTE 2	SCALE: 2:1	TOOL NO:	SHEET 1 OF 1