
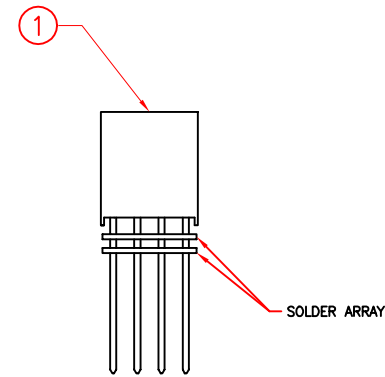
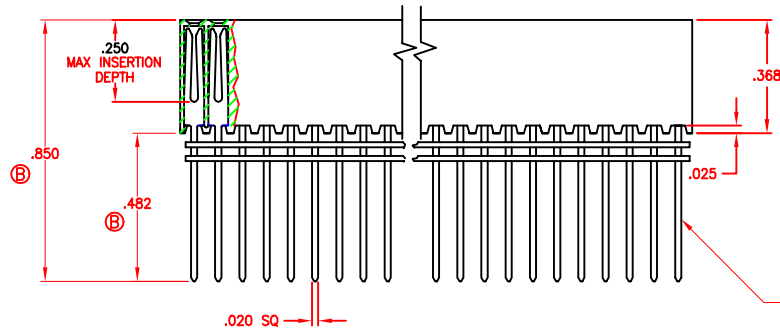


THIS DRAWING CONTAINS PROPRIETARY INFORMATION EXCLUSIVE TO CDMC CON CONNECTORS, AND SHALL NOT BE USED, DUPLICATED OR DISCLOSED IN WHOLE OR IN PART FOR THE MANUFACTURE, PROCUREMENT OR OTHER PURPOSES EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY CDMC CON WORLDWIDE, INC.

REVISIONS

ECO NO:	REV:	DESCRIPTION	DATE	APPROVED
9XXXX	*	XXXX	XX.XX.XX	

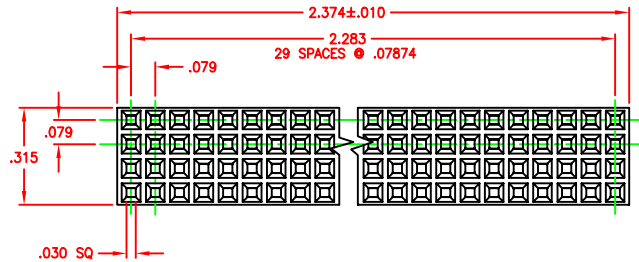

- CONTACT MATERIAL:
PHOSPHOR BRONZE, ALLOY 51000
- INSULATOR MATERIAL:
BLACK, 30% GLASS FILLED THERMOPLASTIC, 94V-0 RATED
OPERATING TEMP RANGE: -65°C TO +250°C
XYDAR LCP RESIN: G-930. RoHS COMPLIANT
- CONTACT PLATING:
G GOLD FLASH 3 TO 5 MICROINCHES PER MIL-G-45204 TYPE II
OVER 50 MICROINCHES OF NICKEL PER QQ-N-290

NOTES: UNLESS OTHERWISE SPECIFIED

FIND	QTY	PART NO.	DESCRIPTION
3	2	40XXX	SOLDER PREFORM
2	120	P40287-02	CONTACT, .020 SQ.
1	1	40343	INSULATOR, 2MM, 4 ROW

LIST OF MATERIALS

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ±1/64 .XX ± .02 .XXX ± .010 ±1°		TITLE: 2MM P, 4 ROW STAMPED SOCKET PC104PLUS W/SOLDER ARRAY	
DRAWN BY: JAE	DATE: 08.07.06	CAT. NO:	
APPROVED:	DATE:	SIZE: A	DWG NO: 50808
MATERIAL: SEE NOTE 2		SCALE: 1:1	REV:
FINISH: SEE NOTE 1		DRAWING:XXXXX	SHEET 1 OF 1