
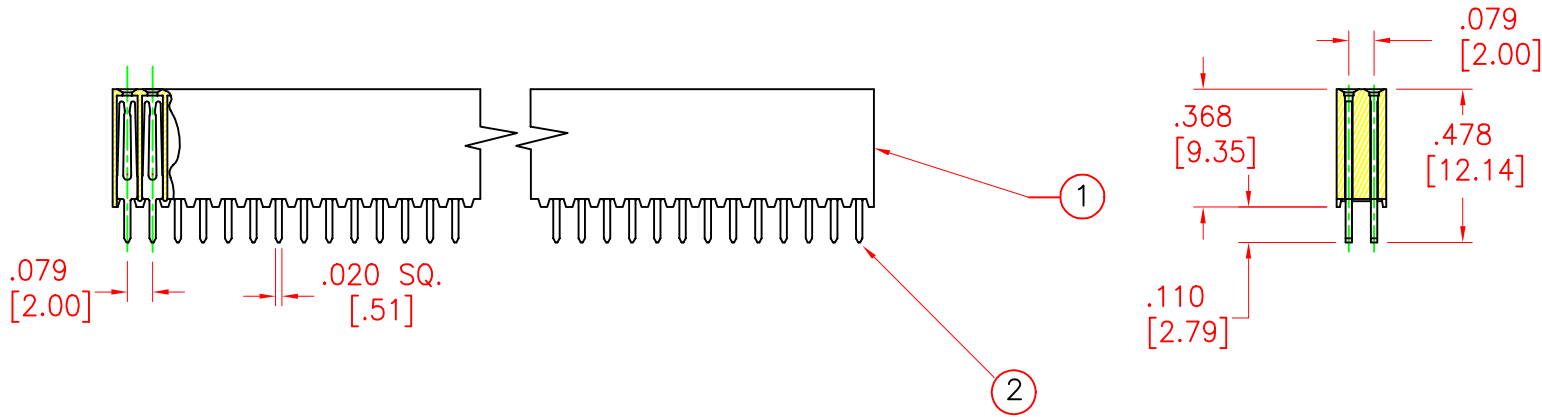


THIS DRAWING CONTAINS PROPRIETARY INFORMATION EXCLUSIVE TO COMM CON CONNECTORS, AND SHALL NOT BE USED, DUPLICATED OR DISCLOSED IN WHOLE OR IN PART FOR THE MANUFACTURE, PROCUREMENT OR OTHER PURPOSES EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY COMM CON WORLDWIDE, INC.

REVISIONS

| ECO NO: | REV: | DESCRIPTION | DATE | APPROVED |
|---------|------|-------------|------|----------|
| XXXX | X | XXXX | * | |

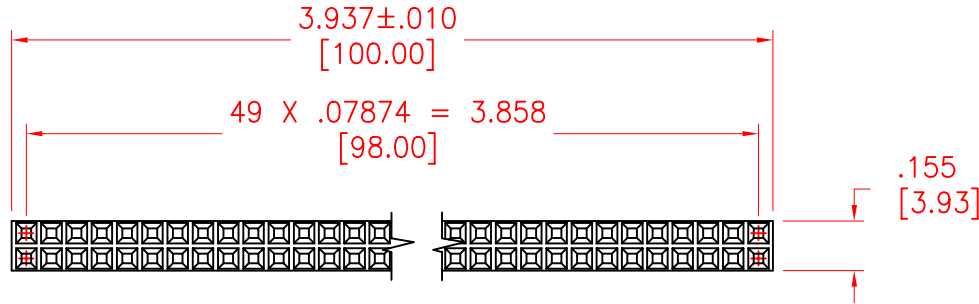

PART NUMBER: 1241H-XXXG2LF

2. MATERIALS: CONTACT - PHOS/BRONZE PER C51000.
 INSULATOR - XYDAR LCP RESIN G-930, 30% GF THERMOPLASTIC, 94V-0, BLK.
 RoHS COMPLIANT
 OPERATING TEMPERATURE: -65°C TO 250°C.
1. FINISH: G2LF GOLD PLATE PER MIL-G-45204 TYPE II, .000010 MIN. ON ENGAGEMENT END AND PURE BRIGHT TIN PLATE PER MIL-T-10727, .000150 MIN. ON TERMINATION END OVER NICKEL PLATE PER QQ-N-290. .000050 MIN.
- NOTES: UNLESS OTHERWISE SPECIFIED

| FIND | QTY | PART NO. | DESCRIPTION |
|------|-----|-----------|--------------------------|
| 2 | 100 | P40287-01 | SOCKET, TUNING FORK, 2MM |
| 1 | 1 | 40473 | INSULATOR, 2MM. 2 ROW |

LIST OF MATERIALS

| | | | |
|---|----------------|---|--------------|
| UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ±1/64 .XX ± .02 ±1° .XXX ± .010 | | TITLE: SOCKET, 2 ROW, 2MM THROUGH HOLE STACKING | |
| DRAWN BY: JE | DATE: 09.13.05 | CAT. NO: 1241H-XXYY | SIZE: A |
| APPROVED: | DATE: | DWG NO: 30279 | REV: |
| MATERIAL: SEE NOTE 2 | SCALE: 1:1 | DRAWING: 3XXXX | SHEET 1 OF 1 |
| FINISH: SEE NOTE 1 | | | |