
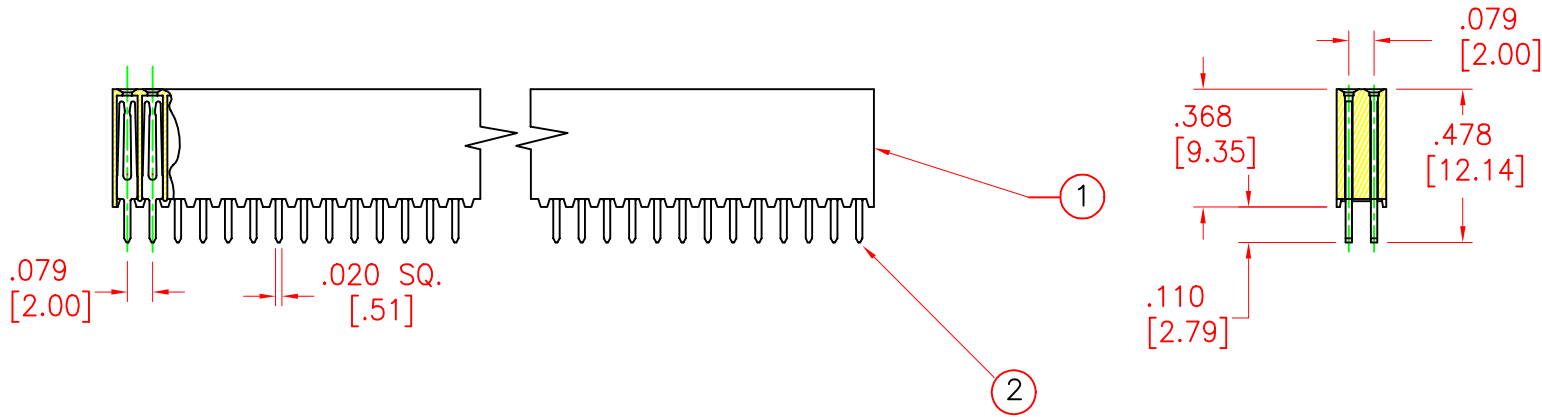


THIS DRAWING CONTAINS PROPRIETARY INFORMATION EXCLUSIVE TO COMM CON CONNECTORS, AND SHALL NOT BE USED, DUPLICATED OR DISCLOSED IN WHOLE OR IN PART FOR THE MANUFACTURE, PROCUREMENT OR OTHER PURPOSES EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY COMM CON WORLDWIDE, INC.

REVISIONS

ECO NO:	REV:	DESCRIPTION	DATE	APPROVED
XXXX	X	XXXX	*	

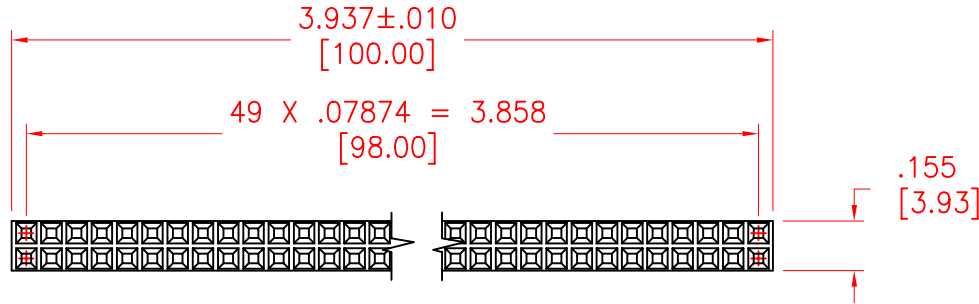

PART NUMBER: 1241H-XXXG2LF

2. MATERIALS: CONTACT - PHOS/BRONZE PER C51000.  
 INSULATOR - XYDAR LCP RESIN G-930, 30% GF THERMOPLASTIC, 94V-0, BLK.  
 RoHS COMPLIANT  
 OPERATING TEMPERATURE: -65°C TO 250°C.
1. FINISH: G2LF GOLD PLATE PER MIL-G-45204 TYPE II, .000010 MIN. ON ENGAGEMENT END AND PURE BRIGHT TIN PLATE PER MIL-T-10727, .000150 MIN. ON TERMINATION END OVER NICKEL PLATE PER QQ-N-290. .000050 MIN.
- NOTES: UNLESS OTHERWISE SPECIFIED

FIND	QTY	PART NO.	DESCRIPTION
2	100	P40287-01	SOCKET, TUNING FORK, 2MM
1	1	40473	INSULATOR, 2MM. 2 ROW

LIST OF MATERIALS

UNLESS OTHERWISE SPECIFIED:  
 DIMENSIONS ARE IN INCHES  
 AND TOLERANCES ARE:  
 FRACTIONS DECIMALS ANGLES  
 ±1/64 .XX ± .02 ±1°  
 .XXX ± .010

TITLE: SOCKET, 2 ROW, 2MM THROUGH HOLE STACKING

DRAWN BY: JE DATE: 09.13.05  
 APPROVED: DATE:

MATERIAL: SEE NOTE 2 CAT. NO: 1241H-XXYY SIZE: A DWG NO: 30279 REV:  
 FINISH: SEE NOTE 1 SCALE: 1:1 DRAWING: 3XXXX SHEET 1 OF 1