


.050	Header	Double Row - .016 High Profile	Rt Angle	Thru Hole
------	--------	--------------------------------	----------	-----------

.050" Center, .016" Square Pin, High Profile - Double Row Right Angle Header

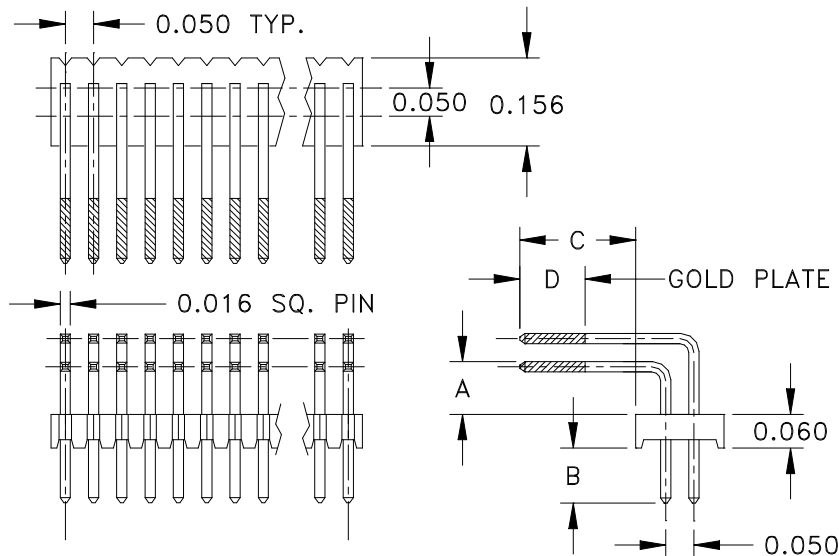

Base Part Number	A		B		C		D		E		Plating Options	Number of Positions
	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch		
3720R	1.52	0.060	3.30	0.130	3.56	0.140	3.56	0.140			G2LF : TLF	2-120
3721R	1.52	0.060	2.87	0.113	3.99	0.157	3.56	0.140			G2LF : TLF	2-120
3722R	2.29	0.090	2.29	0.090	3.81	0.150	3.56	0.140			G2LF : TLF	2-120
3723R	4.83	0.190	2.29	0.090	3.81	0.150	3.56	0.140			G2LF : TLF	2-120
3724R	7.37	0.290	2.29	0.090	3.81	0.150	3.56	0.140			G2LF : TLF	2-120

Technical Notes	
Contact Material:	Pin: Phosphor Bronze - .016"sq. pin, drawn wire, burr free both ends
Insulation Material:	Glass Filled Nylon 46 - UL 94V-0 rated - Black (std)
Heat Deflection:	260°C @ 264 PSI per ASTM D648
Insulation Resistance:	5000 MegOhm @ 500VDC
Current Rating:	1 amps continuous @ 100 VDC/contact
Max Processing Temp:	250°C for 60 seconds
Plastic:	High Temperature Plastic
INTERCONNECT SYSTEMS INC.	
741 Flynn Road, Camarillo, Ca 93012 · (805) 482-2870 · fax (805) 482-8470 · e-mail: info@isipkg.com	